

Part number

# KI 3293 RI5



Interlocked switched socket-outlet, KI series, 2 poles + PE, 9 h (red), 32 A, 380 ÷ 415 V, with compartment for modular units, 7 DIN-rail modules EN 60715

| Product description                     |                                                                                             |
|-----------------------------------------|---------------------------------------------------------------------------------------------|
| Product type                            | Interlocked switched socket-outlet                                                          |
| Series                                  | KI..RI5                                                                                     |
| N. of poles                             | 2 poles +  |
| Clock position                          | 9                                                                                           |
| Size                                    | 143x343 fixing plates FC xx53 TB                                                            |
| Cable entry                             | Pg29                                                                                        |
| Specification                           | With compartment for modular units, 7 DIN-rail modules EN 60715                             |
| Technical data                          |                                                                                             |
| Current                                 | 32 A                                                                                        |
| Voltage                                 | 380 ÷ 415 V                                                                                 |
| IP degree of protection                 | IP55                                                                                        |
| Further technical details               |                                                                                             |
| Weight                                  | 2.100,00 g                                                                                  |
| Operating temperature range (min, max)  | -25°C ... +40°C                                                                             |
| IK rating (impact degree of protection) | IK10                                                                                        |


| Material properties          |                             |
|------------------------------|-----------------------------|
| Colour                       | RAL 7035 grey, RAL 3000 red |
| Approvals / Standards        |                             |
| Reference standard           | EN 60309-1, -2 e -4         |
| General ordering information |                             |
| EAN13 code                   | 8015747049412               |
| Packaging Information        |                             |
| Sub-packaging weight         | 2,10 kg                     |
| Sub-packaging description    | Carton box                  |
| Sub-packaging quantity       | 1 Pcs                       |
| Sub-packaging EAN barcode    | 8015747110440               |

Part number

# KI 3293 RI5



## Catalogue drawings

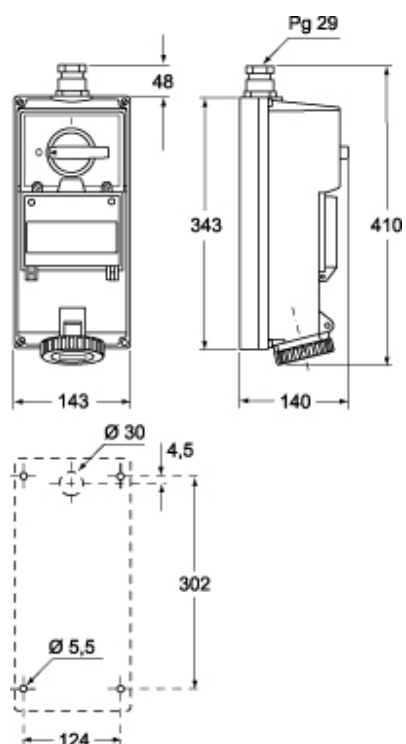

---

Notes