


Part number

KI 3295 RI5



Interlocked switched socket-outlet, KI series, 3 poles + N + PE, 9 h (blue), 32 A, 120/208 ÷ 144/250 V, with compartment for modular units, 7 DIN-rail modules EN 60715

Product description

Product type	Interlocked switched socket-outlet
Series	KI..RI5
N. of poles	3 poles + N + 
Clock position	9
Size	143x343 fixing plates FC xx53 TB
Cable entry	Pg29
Specification	With compartment for modular units, 7 DIN-rail modules EN 60715

Technical data

Current	32 A
Voltage	120/208 ÷ 144/250 V
IP degree of protection	IP55

Further technical details

Weight	2.210,00 g
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK10

Material properties

Colour	RAL 7035 grey, RAL 5015 blue
---------------	------------------------------

Approvals / Standards

Reference standard	EN 60309-1, -2 e -4
---------------------------	---------------------

General ordering information

EAN13 code	8015747049474
-------------------	---------------

Packaging Information


Sub-packaging weight	2,21 kg
Sub-packaging description	Carton box
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747110457

Part number

KI 3295 RI5



Catalogue drawings

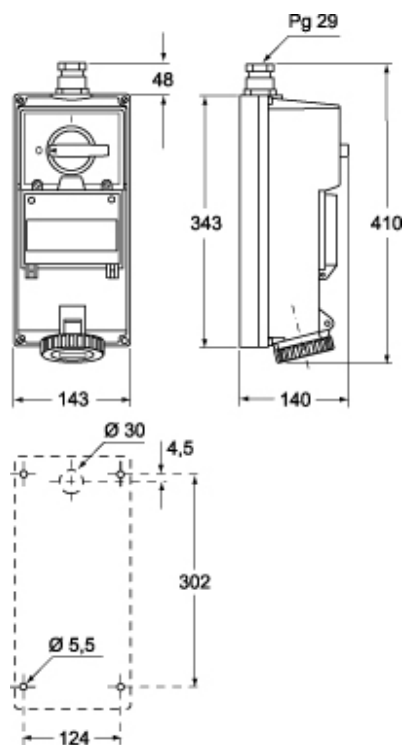

Notes