

Part number

M7P 16.225



Surface mounting housing, V-TYPE series, with 2 levers, M25 x 2 cable entry, size "77.27"

Product description

| | |
|---------------------|-----------------------------|
| Product type | Surface mounting housing |
| Series | V-TYPE |
| Closing type | With 2 levers |
| Size | Size 77.27 |
| Cable entry | With cable entry M25 x 2 |

Technical data

IP degree of protection IP66 / IP67 / IP69

Further technical details

| | |
|---|----------------|
| Weight | 340,00 g |
| Operating temperature range (min, max) | -40°C...+125°C |

Material properties

| | |
|------------------------------|---------------------------------------|
| Other materials | Lever: Stainless steel Gasket: NBR |
| Colour | RAL 7040 grey |
| RoHs conformity | Compliant |
| China RoHs - EFUP | E |
| REACH SVHC substances | No |

Approvals / Standards

| | |
|-----------------------|---------|
| Certifications | DNV, BV |
| UL | ECBT2 |
| cUL | ECBT8 |

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747060295 |
| eCl@ss 8.1 | 27440202 |
| ETIM 7.0 | EC000437 |

Packaging Information

| | |
|----------------------------------|-----------------------|
| Packaging length | 295,00 mm |
| Packaging height | 160,00 mm |
| Packaging width | 300,00 mm |
| Packaging weight | 7,09 kg |
| Packaging volume | 14,16 dm ³ |
| Packaging description | Carton box |
| Packaging quantity | 20 Pcs |
| Packaging EAN code | 8015747044349 |
| Sub-packaging weight | 1,77 kg |
| Sub-packaging description | Plastic packaging |
| Sub-packaging quantity | 5 Pcs |
| Sub-packaging EAN barcode | 8015747044400 |


Part number

M7P 16.225



Catalogue drawings

C7P - C7AP M7P - M7AP

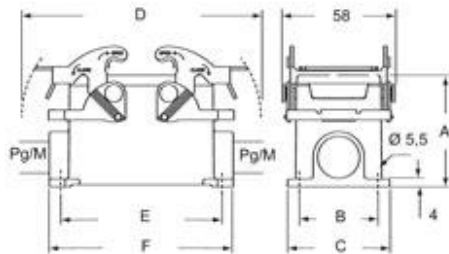

| | A | B | C | D | E | F |
|--------------|----|----|----|-------|-----|------|
| C7P/M7P 10 | 57 | 40 | 52 | 122 | 82 | 93,5 |
| C7P/M7P 16 | 63 | 45 | 57 | 142,5 | 105 | 117 |
| C7P/M7P 24 | 63 | 45 | 57 | 169 | 132 | 144 |
| C7AP/M7AP 10 | 73 | 45 | 57 | 122 | 82 | 93,5 |
| C7AP/M7AP 16 | 77 | 45 | 57 | 142,5 | 105 | 117 |
| C7AP/M7AP 24 | 80 | 45 | 57 | 169 | 132 | 144 |

Notes