


Part number

PE 1683 PIF



Flush-mounting socket outlet, PLUSO series, 2 poles + PE, 8 h (white), 16 A, > 250 V, inclined, with bigger flange

Product description

| | |
|-----------------------|---|
| Product type | Socket Flush-mounting |
| Series | PE...PIF, PLUSO |
| N. of poles | 2 poles +  |
| Clock position | 8 |
| Specification | Inclined, bigger flange |

Technical data

| | |
|--------------------------------|---------|
| Current | 16 A |
| Voltage | > 250 V |
| IP degree of protection | IP44 |

Further technical details

| | |
|---|-----------------|
| Operating temperature range (min, max) | -25°C ... +40°C |
|---|-----------------|

Material properties

| | |
|---------------|-------------------------------|
| Colour | RAL 7035 grey, RAL 9010 white |
|---------------|-------------------------------|

Approvals / Standards

| | |
|---------------------------|-------------------|
| Reference standard | EN 60309-1 and -2 |
|---------------------------|-------------------|

General ordering information


| | |
|-------------------|---------------|
| EAN13 code | 8015747155113 |
|-------------------|---------------|

Part number

PE 1683 PIF



Catalogue drawings

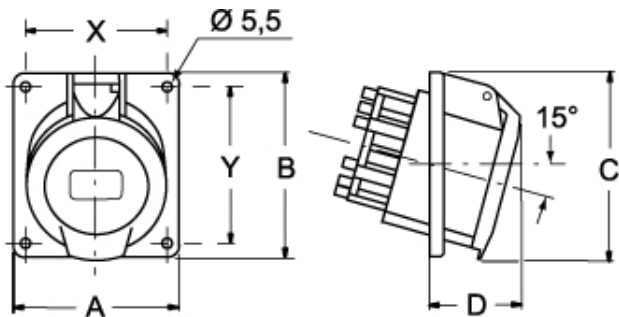

| | | | A | B | C | D | X | Y |
|------------|-------------|--------|----|-----|----|----|----|----|
| PIF | 16 A | 2P+⊕ | 92 | 100 | -- | 52 | 77 | 85 |
| | | 3P+⊕ | 92 | 100 | -- | 53 | 77 | 85 |
| PI | 16 A | 2P+⊕ | 64 | 82 | -- | 38 | 52 | 60 |
| | | 3P+⊕ | 64 | 82 | -- | 42 | 52 | 60 |
| | | 3P+N+⊕ | 92 | 100 | -- | 43 | 77 | 60 |
| PI | 32 A | 2P+⊕ | 92 | 100 | -- | 40 | 77 | 85 |
| | | 3P+⊕ | 92 | 100 | -- | 40 | 77 | 85 |
| | | 3P+N+⊕ | 92 | 102 | -- | 43 | 77 | 85 |

Notes