



Part number

# PEW 12545 SV

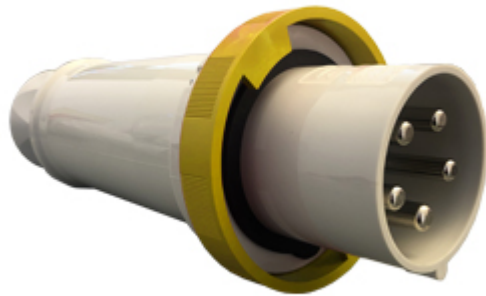

Mobile plug, PLUSO series, 3 poles + N + PE, 4 h (yellow), 125 A, 57/100 ÷ 75/130 V, straight

## Product description

<b>Product type</b>	Plug Mobile
<b>Series</b>	PEW...SV, PLUSO
<b>N. of poles</b>	3 poles + N + 
<b>Clock position</b>	4
<b>Specification</b>	Straight

## Technical data

<b>Current</b>	125 A
<b>Voltage</b>	57/100 ÷ 75/130 V
<b>IP degree of protection</b>	IP67

## Further technical details

<b>Weight</b>	1.785,00 g
<b>Operating temperature range (min, max)</b>	-25°C ... +40°C

## Material properties

<b>Colour</b>	RAL 7035 grey, RAL 1021 yellow
<b>RoHs conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>China RoHs - EFUP</b>	50
<b>REACH SVHC substances</b>	Yes Lead
<b>SCIP number</b>	Ca7de37f-add8-4b77-9861-279c94903ade

## Approvals / Standards

<b>Reference standard</b>	EN 60309-1 and -2
---------------------------	-------------------

## General ordering information

<b>EAN13 code</b>	8015747070041
-------------------	---------------

## Packaging Information

<b>Sub-packaging length</b>	325,00 mm
<b>Sub-packaging height</b>	125,00 mm
<b>Sub-packaging width</b>	125,00 mm
<b>Sub-packaging weight</b>	1,79 kg
<b>Sub-packaging volume</b>	5,08 dm <sup>3</sup>
<b>Sub-packaging description</b>	Carton box
<b>Sub-packaging quantity</b>	1 Pcs
<b>Sub-packaging EAN barcode</b>	8015747070058

Part number

# PEW 12545 SV



Catalogue drawings

(63 / 125A) PEW ... SV



PEW ... SV	A	B	Pg Ø
<b>63A</b> 2P+⊕	264,5	112	36
3P+⊕	264,5	112	36
3P+N+⊕	264,5	112	36
<b>125A</b> 2P+⊕	310	130	2" gas
3P+⊕	310	130	2" gas
3P+N+⊕	310	130	2" gas

Notes