


Part number

PK 1645 PB5



Interlocked switched socket-outlet, PK series,
3 poles + N + PE, 4 h (yellow), 16 A, 57/100 ÷
75/130 V, E16 fuse carrier



Product description		Material properties	
Product type	Interlocked switched socket-outlet	Colour	RAL 7035 grey, RAL 1021 yellow
Series	PK..PB5		Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	3 poles + N + 	RoHs conformity	6(c): copper alloy containing up to 4% lead by weight
Clock position	4	China RoHs - EFUP	50
Specification	E16 fuse carrier	REACH SVHC substances	Yes Lead
Technical data		SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Current	16 A	Approvals / Standards	
Voltage	57/100 ÷ 75/130 V	Reference standard	EN 60309-1, -2 e -4
IP degree of protection	IP55	General ordering information	
Further technical details		EAN13 code	8015747080118
Weight	1.600,00 g	Packaging Information	
Operating temperature range (min, max)	-25°C ... +40°C	Sub-packaging length	285,00 mm
IK rating (impact degree of protection)	IK10	Sub-packaging height	130,00 mm
		Sub-packaging width	130,00 mm
		Sub-packaging weight	1,60 kg
		Sub-packaging volume	4,82 dm ³
		Sub-packaging description	Carton box
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747080125

Part number

PK 1645 PB5



Catalogue drawings

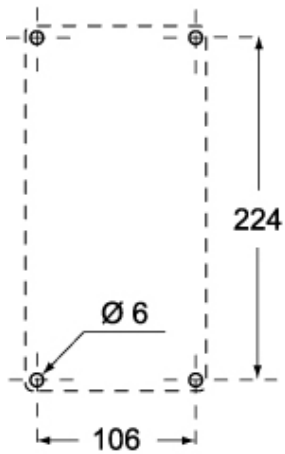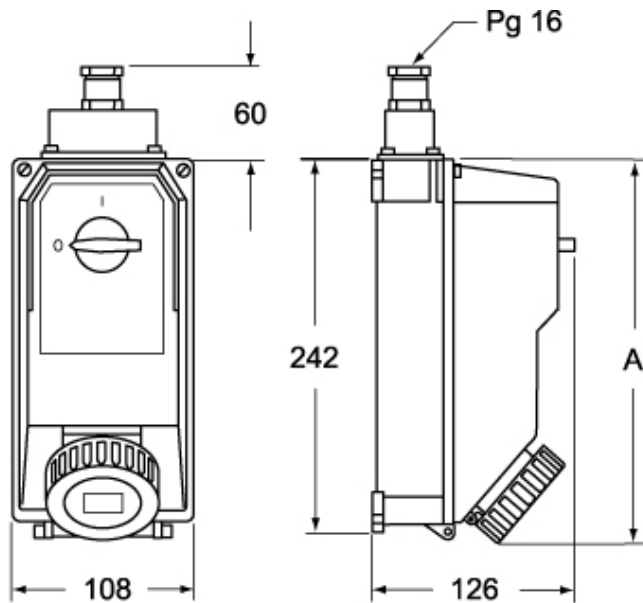

	A
2P+⊕	260
3P+⊕	260
3P+N+⊕	270

Notes