

Part number

PK 1664 PB5



Interlocked switched socket-outlet, PK series,
3 poles + PE, 6 h (red), 16 A, 380 ÷ 415 V,
E16 fuse carrier

Product description	
Product type	Interlocked switched socket-outlet
Series	PK..PB5
N. of poles	3 poles +
Clock position	6
Specification	E16 fuse carrier
Technical data	
Current	16 A
Voltage	380 ÷ 415 V
IP degree of protection	IP55
Further technical details	
Weight	1.550,00 g
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK10



Material properties	
Colour	RAL 7035 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Approvals / Standards	
Reference standard	EN 60309-1, -2 e -4
General ordering information	
EAN13 code	8015747080286
Packaging Information	
Packaging weight	13,95 kg
Packaging volume	52,36 dm ³
Packaging description	Carton box
Packaging quantity	9 Pcs
Packaging EAN code	8015747107631
Sub-packaging weight	1,55 kg
Sub-packaging description	Carton box
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747080309

Part number

PK 1664 PB5



Catalogue drawings

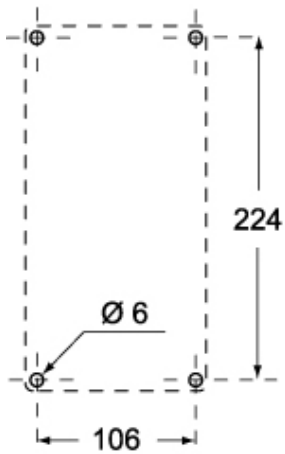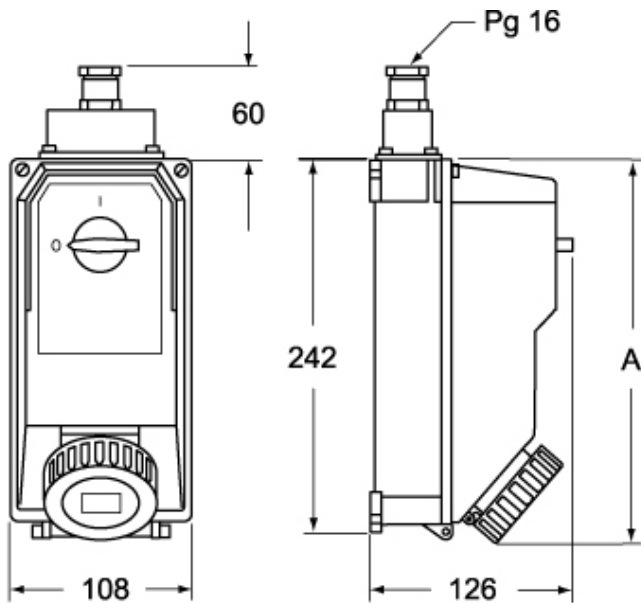

	A
2P+⊕	260
3P+⊕	260
3P+N+⊕	270

Notes