

Part number

PK 3263 PB5



Interlocked switched socket-outlet, PK series,
2 poles + PE, 6 h (blue), 32 A, 200 ÷ 250 V,
E33 - DIII fuse carrier


Product description		Material properties	
Product type	Interlocked switched socket-outlet	Colour	RAL 7035 grey, RAL 5015 blue
Series	PK..PB5		Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	2 poles +	RoHs conformity	50
Clock position	6	China RoHs - EFUP	50
Specification	E33 - DIII fuse carrier	REACH SVHC substances	Yes Lead
Technical data		SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Current	32 A	Approvals / Standards	
Voltage	200 ÷ 250 V	Reference standard	EN 60309-1, -2 e -4
IP degree of protection	IP55	General ordering information	
Further technical details		EAN13 code	8015747081351
Weight	3.170,00 g	Packaging Information	
Operating temperature range (min, max)	-25°C ... +40°C	Packaging length	400,00 mm
IK rating (impact degree of protection)	IK10	Packaging height	310,00 mm
		Packaging width	670,00 mm
		Packaging weight	25,46 kg
		Packaging volume	83,08 dm ³
		Packaging description	Carton box
		Packaging quantity	8 Pcs
		Packaging EAN code	8015747081368
		Sub-packaging length	150,00 mm
		Sub-packaging height	140,00 mm
		Sub-packaging width	380,00 mm
		Sub-packaging weight	3,18 kg
		Sub-packaging volume	7,98 dm ³
		Sub-packaging description	Carton box
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747081375

Part number

PK 3263 PB5



Catalogue drawings

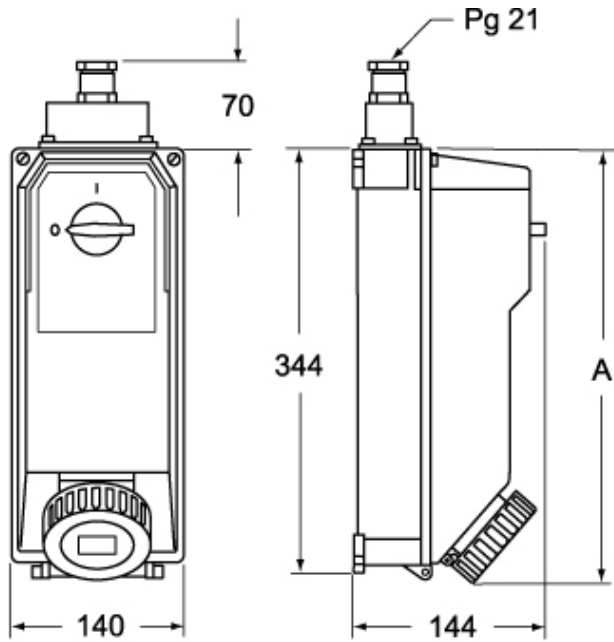

	A
2P+⊕	363
3P+⊕	370
3P+N+⊕	370

Notes