


Part number

SIPW 1665 SV



Mobile plug, PLUSO series, 3 poles + N + PE, 6 h (red), 16 A, 200/346 ÷ 240/415 V, with phase inverter

| Product description | | Material properties | |
|---|---|-------------------------------------|---|
| Product type | Plug Mobile | Colour | RAL 7035 grey, RAL 3000 red |
| Series | SIPW...SV, PLUSO | RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| Connection type | Screw terminal connection | China RoHs - EFUP | 50 |
| N. of poles | 3 poles + N +  | REACH SVHC substances | Yes Lead |
| Clock position | 6 | SCIP number | Ca7de37f-add8-4b77-9861-279c94903ade |
| Specification | With phase inverter | Approvals / Standards | |
| Technical data | | Reference standard | EN 60309-1 and -2 |
| Current | 16 A | General ordering information | |
| Voltage | 200/346 ÷ 240/415 V | EAN13 code | 8015747084017 |
| IP degree of protection | IP67 | Packaging Information | |
| Further technical details | | Packaging length | 255,00 mm |
| Weight | 191,00 g | Packaging height | 195,00 mm |
| Operating temperature range (min, max) | -25°C ... +40°C | Packaging width | 245,00 mm |
| | | Packaging weight | 2,15 kg |
| | | Packaging volume | 12,18 dm ³ |
| | | Packaging description | Carton box |
| | | Packaging quantity | 10 Pcs |
| | | Packaging EAN code | 8015747084024 |


Part number

SIPW 1665 SV



Catalogue drawings

SIP ... SV

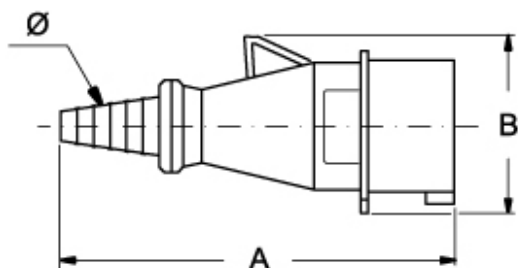


| | A | B | Ø min | Ø min |
|------------|----------|----------|--------------|--------------|
| 16A | 167,5 | 75 | 9 | 22 |
| 32A | 192,5 | 87 | 9 | 22 |

Catalogue drawings



SIPW ... SV

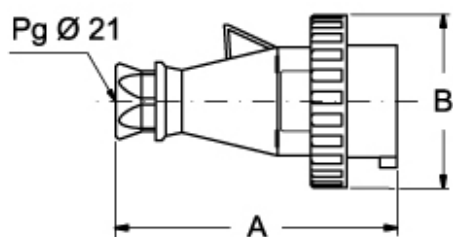

| | A | B |
|------------|----------|----------|
| 16A | 150 | 86 |
| 32A | 175 | 99,5 |

Notes