

Part number

SQ 1645



Interlocked switched socket-outlet, SQ series,
3 poles + N + PE, 4 h (yellow), 16 A, 57/100 ÷
75/130 V, without fuse-carrier


Product description		Material properties	
Product type	Interlocked switched socket-outlet	Colour	RAL 7035 grey, RAL 1021 yellow
Series	SQ		Compliant with exemption
N. of poles	3 poles + N +	RoHs conformity	6(c): copper alloy containing up to 4% lead by weight
Clock position	4	China RoHs - EFUP	50
Size	Socket centre distance 115 x 144 mm	REACH SVHC substances	Yes Lead
Specification	Without fuse-carrier	SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Technical data		Approvals / Standards	
Current	16 A	Reference standard	EN 60309-1, -2 e -4
Voltage	57/100 ÷ 75/130 V	General ordering information	
IP degree of protection	IP44	EAN13 code	8015747084185
Further technical details		Packaging Information	
Weight	431,00 g	Sub-packaging length	116,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Sub-packaging height	113,00 mm
IK rating (impact degree of protection)	IK08	Sub-packaging width	142,00 mm
		Sub-packaging weight	0,43 kg
		Sub-packaging volume	1,86 dm ³
		Sub-packaging description	Carton box
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747109161

Part number


SQ 1645



Catalogue drawings

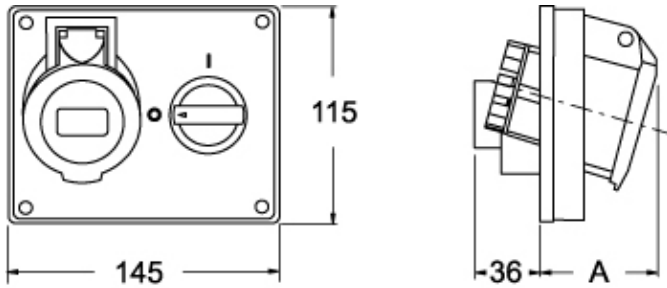

SQ		A
16A	2P+ \oplus	59
	3P+ \oplus	63
	3P+N+ \oplus	63

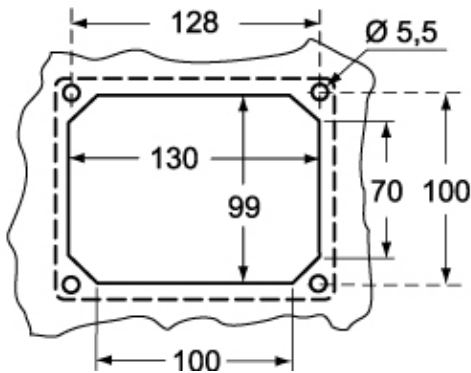

Notes