


Part number
SQ 1665



Interlocked switched socket-outlet, SQ series,
 3 poles + N + PE, 6 h (red), 16 A, 200/346 ÷
 240/415 V, without fuse-carrier

Product description	
Product type	Interlocked switched socket-outlet
Series	SQ
N. of poles	3 poles + N + 
Clock position	6
Size	Socket centre distance 115 x 144 mm
Specification	Without fuse-carrier
Technical data	
Current	16 A
Voltage	200/346 ÷ 240/415 V
IP degree of protection	IP44
Further technical details	
Weight	442,00 g
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK08


Material properties	
Colour	RAL 7035 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Approvals / Standards	
Reference standard	EN 60309-1, -2 e -4
General ordering information	
EAN13 code	8015747084338
Packaging Information	
Packaging length	225,00 mm
Packaging height	180,00 mm
Packaging width	435,00 mm
Packaging weight	4,78 kg
Packaging volume	17,62 dm ³
Packaging description	Carton box
Packaging quantity	10 Pcs
Packaging EAN code	8015747084345
Sub-packaging weight	0,48 kg
Sub-packaging description	Carton box
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747084352

Part number


SQ 1665



Catalogue drawings

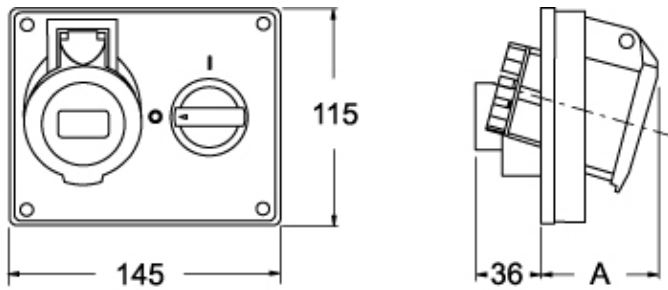

SQ		A
16A	2P+⊕	59
	3P+⊕	63
	3P+N+⊕	63

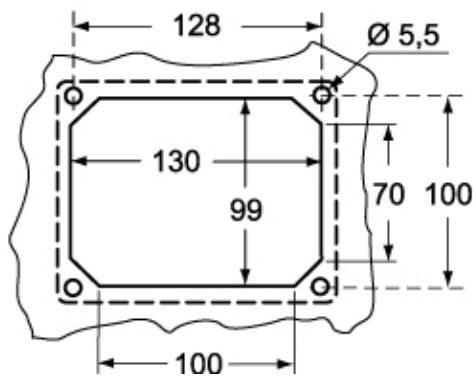

Notes