


Part number

# SQV 3235



Interlocked switched socket-outlet, SQV series, 3 poles + N + PE, 3 h (red), 32 A, 220/380 V, sectionable fuse carrier 10 x 38 mm

#### Product description

|                       |   |
|-----------------------|---|
| <b>Product type</b>   | Interlocked switched socket-outlet  |
| <b>Series</b>         | SQV   |
| <b>N. of poles</b>    | 3 poles + N +  |
| <b>Clock position</b> | 3   |
| <b>Specification</b>  | Sectionable fuse carrier 10 x 38 mm   |

#### Technical data

|                                |                                 |
|--------------------------------|---------------------------------|
| <b>Current</b>                 | 32 A                            |
| <b>Voltage</b>                 | 220/380V (50Hz) 250/440V (60Hz) |
| <b>IP degree of protection</b> | IP44                            |

#### Further technical details

|  |                 |
|--|-----------------|
| <b>Operating temperature range (min, max)</b>  | -25°C ... +40°C |
| <b>IK rating (impact degree of protection)</b> | IK08            |

#### Material properties

|               |                             |
|---------------|-----------------------------|
| <b>Colour</b> | RAL 7035 grey, RAL 3000 red |
|---------------|-----------------------------|

#### Approvals / Standards

|                           |                     |
|---------------------------|---------------------|
| <b>Reference standard</b> | EN 60309-1, -2 e -4 |
|---------------------------|---------------------|

#### General ordering information


|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747160445 |
|-------------------|---------------|

Part number


# SQV 3235



Catalogue drawings

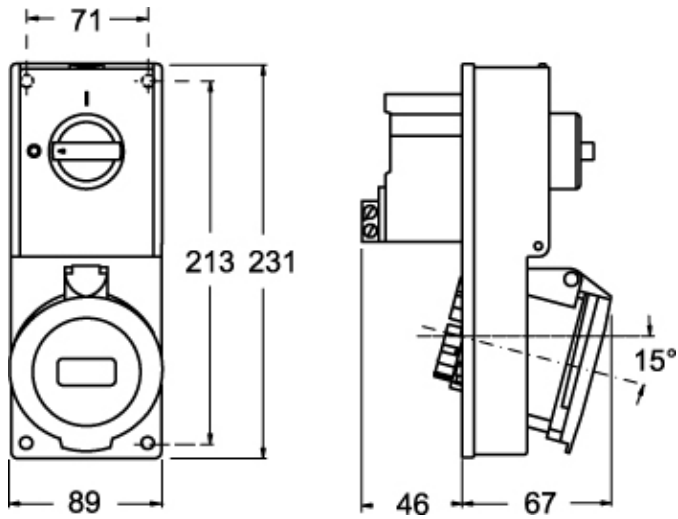

Catalogue drawings

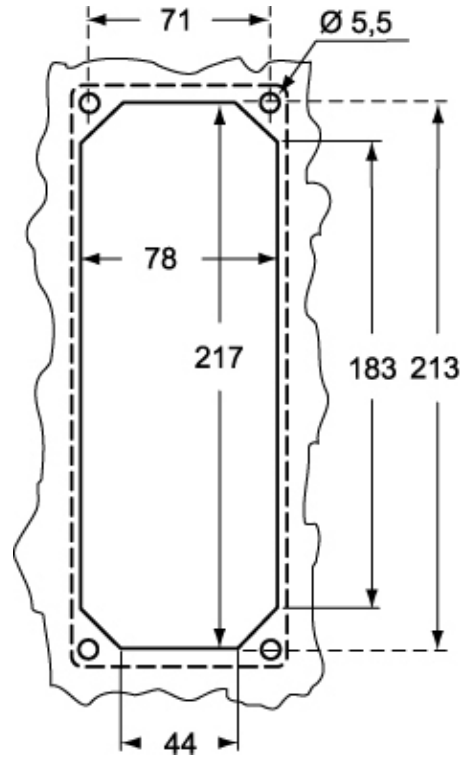

Notes