

Part number

TM 3294KSIR



Interlocked switched socket-outlet, TM series, 3 poles + PE, 9 h (blue), 32 A, 200 ÷ 250 V, with compartment for modular units, 4,5 DIN-rail modules EN 60715, without base box


Product description		Material properties	
Product type	Interlocked switched socket-outlet	Colour	RAL 7012 grey, RAL 5015 blue
Series	TM...SIR/KSIR	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	3 poles + 	China RoHs - EFUP	50
Clock position	9	REACH SVHC substances	Yes Lead
Size	114 x 255 mm fixing distance, for assembly in single or multiple boxes	SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Specification	With compartment for modular units, 4,5 DIN-rail modules EN 60715 Without base box	Approvals / Standards	
Technical data		Reference standard	EN 60309-1, -2 e -4
Current	32 A	General ordering information	
Voltage	200 ÷ 250 V	EAN13 code	8015747126250
IP degree of protection	IP66 / IP67	Packaging Information	
Further technical details		Packaging length	385,00 mm
Weight	1.110,00 g	Packaging height	320,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging width	485,00 mm
UL 94 flammability rating	V-2	Packaging weight	9,99 kg
IK rating (impact degree of protection)	IK10	Packaging volume	59,75 dm ³
		Packaging description	Carton box
		Packaging quantity	9 Pcs
		Packaging EAN code	8015747126748
		Sub-packaging length	95,00 mm
		Sub-packaging height	40,00 mm
		Sub-packaging width	253,00 mm
		Sub-packaging weight	1,11 kg
		Sub-packaging volume	0,96 dm ³
		Sub-packaging description	Carton tray
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747126755

Part number

TM 3294KSIR



Catalogue drawings

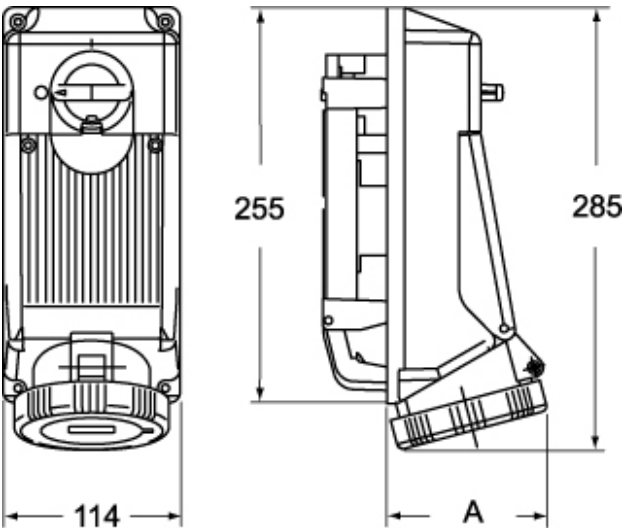

	A
2P+⊕	96
3P+⊕	96
3P+N+⊕	101

Notes