


Part number

CTM 16 R

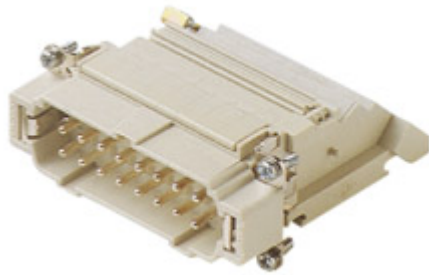

Male insert, CT series, screw terminal connection, 16 poles + PE, 16 A 230/400 V 4 kV 2, size "77.27", with incorporated terminal block, right side mounting





| Product description | | Material properties | |
|---|---|----------------------------------|--|
| Product type | Insert | Main material | Polycarbonate (PC) |
| Series | CT | Other materials | Contacts: copper alloy |
| Connection type | Screw terminal connection | Colour | RAL 7032 grey |
| Gender | Male | RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| N. of poles | 16 poles + | China RoHs - EFUP | 50 |
| Size | Size 77.27 | REACH SVHC substances | Yes Lead |
| Specification | Right side mounting With incorporated terminal block | SCIP number | 1a9c93ff-0445-4a16-81e3-1609ac5274d6 |
| Technical data | | Approvals / Standards | |
| Current | 16 A | Reference standard | EN 61984:2009-06 |
| Voltage | 230 - 400 V | Certifications | CSA, CQC, DNV, BV, EAC |
| Rated impulse withstand voltage | 4 kV | UL | ECBT2 |
| Pollution degree | 2 | General ordering information | |
| Rated voltage according to UL/CSA | 600 V | EAN13 code | 8015747041225 |
| Wire cross-section | 0,75 mm ² - 2,50 mm ² | eCl@ss 8.1 | 27440205 |
| AWG size | 18 - 14 | ETIM 7.0 | EC000438 |
| Contact type | Turned silver plated | Packaging Information | |
| IP degree of protection | IP20 without enclosure, IP66/IP69 with enclosure | Packaging weight | 0,70 kg |
| Further technical details | | Packaging description | Carton box |
| Characteristics according to EN 61984 | 10A 230/400V 4kV 3; 10A 400V 4kV 2 | Packaging quantity | 4 Pcs |
| Mating cycles | ≥ 500 | Packaging EAN code | 8015747041232 |
| Insulation resistance | ≥ 10 GΩ | Sub-packaging length | 145,00 mm |
| Contact resistance | ≤ 4 mΩ | Sub-packaging height | 89,00 mm |
| Weight | 170,00 g | Sub-packaging width | 90,00 mm |
| Operating temperature range (min, max) | -40 °C ... +125 °C | Sub-packaging weight | 0,18 kg |
| Conductors stripping length | 12 mm | Sub-packaging volume | 1,16 dm ³ |
| UL 94 flammability rating | V-0 | Sub-packaging description | Plastic packaging |
| Torque for main contact | M2,6: 0,4 Nm; 3,5 lb.in (0,5 x 3 mm) | Sub-packaging quantity | 1 Pcs |
| Tightening torque for PE connection | M4: 1,2 Nm, 10,6 lb.in (Ph2 or 1,0x5,5mm) | Sub-packaging EAN barcode | 8015747041249 |
| Tightening torque for fixing screws | M3: 0.5 Nm; 4.4 lb.in (Ph1 or 0.8x4 mm) | | |

Part number

CTM 16 R




Catalogue drawings



(L)

(R)



(L)

(R)

