

Part number

CX7MA 25 P



Male crimp contact, CX7 series, 70 A, turned silver plated, wire cross section 25 mm², AWG 4 - 3, finger-proof version


| Product description | | Material properties | |
|---|-----------------------|----------------------------------|--|
| Product type | Crimp contact | Main material | Copper alloy |
| Series | CX7 | Other materials | Cap: polycarbonate (PC) |
| Gender | Male | | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| Specification | Finger-proof version | RoHs conformity | |
| Technical data | | China RoHs - EFUP | 50 |
| Current | 70 A | REACH SVHC substances | Yes Lead |
| Wire cross-section | 25,00 mm ² | SCIP number | C0979fba-9907-458f-a94a-db781440f273 |
| AWG size | 4 - 3 | Approvals / Standards | |
| Contact type | Turned silver plated | Certifications | EAC |
| Further technical details | | UL | ECBT2 |
| Mating cycles | ≥ 500 | cUL | ECBT8 |
| Contact resistance | ≤ 0,5 mΩ | General ordering information | |
| Weight | 10,00 g | EAN13 code | 8015747279185 |
| Operating temperature range (min, max) | -40°C ... +125°C | eCl@ss 8.1 | 27440204 |
| Conductors stripping length | 15 mm | ETIM 7.0 | EC000796 |
| | | Packaging Information | |
| | | Sub-packaging length | 50,00 mm |
| | | Sub-packaging height | 44,00 mm |
| | | Sub-packaging width | 50,00 mm |
| | | Sub-packaging weight | 0,16 kg |
| | | Sub-packaging volume | 0,11 dm ³ |
| | | Sub-packaging description | Plastic box |
| | | Sub-packaging quantity | 16 Pcs |
| | | Sub-packaging EAN barcode | 8015747279192 |

Part number

CX7MA 25 P



Catalogue drawings

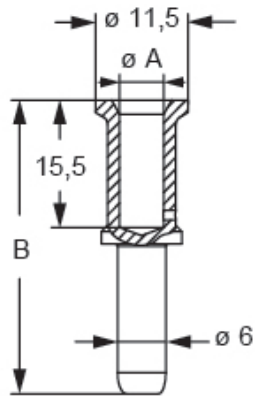

CX7MA .. P contacts

| part No. | $\varnothing A$ (mm) | B (mm) | stripping length (mm) |
|-------------|-------------------------|-----------|--------------------------|
| CX7MA 6.0 P | 3,5 | 36,6 | 15 |
| CX7MA 10 P | 4,3 | 35,8 | 15 |
| CX7MA 16 P | 5,5 | 35,8 | 15 |
| CX7MA 25 P | 7,0 | 35,8 | 15 |