


Part number

PE 1624 PV



Mobile socket outlet, PLUSO series, 3 poles + PE, 2 h (green), 16 A, > 50 V

Product description

| | |
|------------------------|---|
| Product type | Socket Mobile |
| Series | PE...PV, PLUSO |
| Connection type | Screw terminal connection |
| N. of poles | 3 poles +  |
| Clock position | 2 |

Technical data

| | |
|--------------------------------|--------|
| Current | 16 A |
| Voltage | > 50 V |
| IP degree of protection | IP44 |

Further technical details

| | |
|---|-----------------|
| Weight | 150,00 g |
| Operating temperature range (min, max) | -25°C ... +40°C |

Material properties

| | |
|------------------------------|--|
| Colour | RAL 7035 grey, RAL 6017 green |
| RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| China RoHs - EFUP | 50 |
| REACH SVHC substances | Yes Lead |
| SCIP number | Ca7de37f-add8-4b77-9861-279c94903ade |

Approvals / Standards

| | |
|---------------------------|-------------------|
| Reference standard | EN 60309-1 and -2 |
|---------------------------|-------------------|

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747063340 |
|-------------------|---------------|

Packaging Information

| | |
|----------------------------------|---------------|
| Packaging length | 208,00 mm |
| Packaging height | 140,00 mm |
| Packaging width | 290,00 mm |
| Sub-packaging weight | 1,50 kg |
| Sub-packaging description | Carton box |
| Sub-packaging quantity | 10 Pcs |
| Sub-packaging EAN barcode | 8015747063357 |


Part number

PE 1624 PV



Catalogue drawings

(16 / 32A) PE ... PV

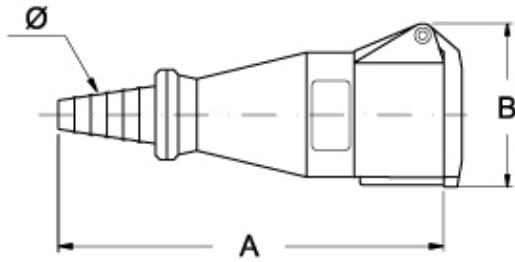

| PE...PV | A | B | Ø min | Ø max |
|-----------------|-------|----|-------|-------|
| 16A 2P+⊕ | 157,5 | 68 | 7 | 17 |
| 3P+⊕ | 164,5 | 76 | 7 | 17 |
| 3P+N+⊕ | 183,5 | 83 | 9 | 22 |
| 32A 2P+⊕ | 200,5 | 87 | 9 | 22 |
| 3P+⊕ | 200,5 | 87 | 9 | 22 |
| 3P+N+⊕ | 200,5 | 91 | 9 | 22 |