


Part number

PE 3265 PI



Flush-mounting socket outlet, PLUSO series, 3 poles + N + PE, 6 h (red), 32 A, 380 ÷ 415 V, inclined

| Product description | | Material properties | |
|---|---|------------------------------|--|
| Product type | Socket Flush-mounting | Colour | RAL 7035 grey, RAL 3000 red |
| Series | PE...PI, PLUSO | RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| Connection type | Screw terminal connection | China RoHs - EFUP | 50 |
| N. of poles | 3 poles + N +  | REACH SVHC substances | Yes Lead |
| Clock position | 6 | SCIP number | Ca7de37f-add8-4b77-9861-279c94903ade |
| Size | Socket fixing centre distance 77 x 85 mm | Approvals / Standards | |
| Specification | Inclined | Reference standard | EN 60309-1 and -2 |
| Technical data | | General ordering information | |
| Current | 32 A | EAN13 code | 8015747067454 |
| Voltage | 380 ÷ 415 V | Packaging Information | |
| IP degree of protection | IP44 | Packaging length | 330,00 mm |
| Further technical details | | Packaging height | 175,00 mm |
| Weight | 222,00 g | Packaging width | 295,00 mm |
| Operating temperature range (min, max) | -25°C ... +40°C | Packaging weight | 2,50 kg |
| | | Packaging volume | 17,04 dm ³ |
| | | Packaging description | Carton box |
| | | Packaging quantity | 10 Pcs |
| | | Packaging EAN code | 8015747067461 |


Part number

PE 3265 PI



Catalogue drawings

(16 / 32A) PE ... PI

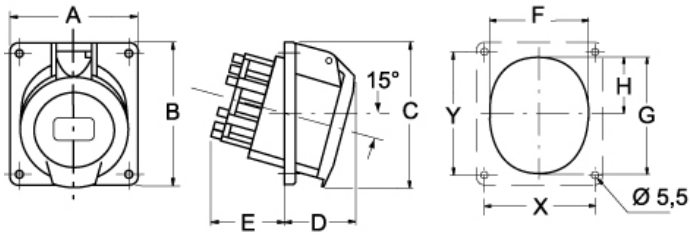

| PE ... PI | A | B | C | D | E | F | G | H | X | Y |
|-----------------|----|-----|-----|----|----|----|----|------|----|----|
| 16A 2P+⊕ | 64 | 82 | 82 | 38 | 46 | 52 | 62 | 30 | 52 | 60 |
| 3P+⊕ | 64 | 82 | 82 | 42 | 47 | 57 | 65 | 28 | 52 | 60 |
| 3P+N+⊕ | 92 | 100 | 100 | 43 | 47 | 66 | 78 | 37,5 | 77 | 85 |
| 32A 2P+⊕ | 92 | 100 | 100 | 40 | 55 | 68 | 76 | 35,5 | 77 | 85 |
| 3P+⊕ | 92 | 100 | 100 | 40 | 55 | 68 | 76 | 35,5 | 77 | 85 |
| 3P+N+⊕ | 92 | 102 | 102 | 43 | 55 | 74 | 86 | 39,5 | 77 | 85 |