


Part number

PEW 6393 PI



Flush-mounting socket outlet, PLUSO series, 2 poles + PE, 9 h (red), 63 A, 380 ÷ 415 V, inclined

Product description

| | |
|-----------------------|---|
| Product type | Socket Flush-mounting |
| Series | PEW...PI, PLUSO |
| N. of poles | 2 poles +  |
| Clock position | 9 |
| Specification | Inclined |

Technical data

| | |
|--------------------------------|-------------|
| Current | 63 A |
| Voltage | 380 ÷ 415 V |
| IP degree of protection | IP67 |

Further technical details

| | |
|---|-----------------|
| Weight | 590,00 g |
| Operating temperature range (min, max) | -25°C ... +40°C |

Material properties

| | |
|------------------------------|--|
| Colour | RAL 7035 grey, RAL 3000 red |
| RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| China RoHs - EFUP | 50 |
| REACH SVHC substances | Yes Lead |
| SCIP number | Ca7de37f-add8-4b77-9861-279c94903ade |

Approvals / Standards

| | |
|---------------------------|-------------------|
| Reference standard | EN 60309-1 and -2 |
|---------------------------|-------------------|

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747078047 |
|-------------------|---------------|

Packaging Information

| | |
|------------------------------|----------------------|
| Packaging length | 290,00 mm |
| Packaging height | 140,00 mm |
| Packaging width | 215,00 mm |
| Packaging weight | 3,15 kg |
| Packaging volume | 8,73 dm ³ |
| Packaging description | Carton box |
| Packaging quantity | 4 Pcs |
| Packaging EAN code | 8015747078054 |


Part number

PEW 6393 PI



Catalogue drawings

(63 /125A) PEW ... PI

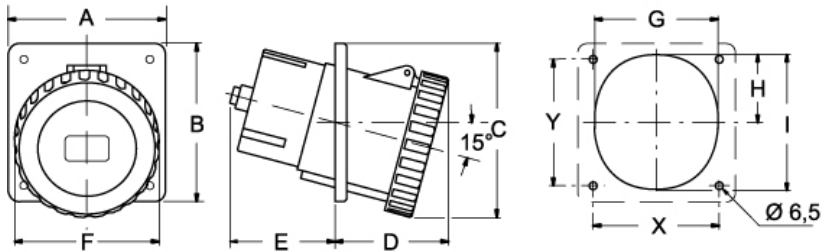

| PEW ... PI | A | B | C | D | E | F | G | H | I | X | Y |
|------------------|-----|-----|-----|----|----|-----|-----|----|-----|-----|-----|
| 63A 2P+⊕ | 100 | 107 | 124 | 84 | 55 | 107 | 82 | 45 | 94 | 77 | 85 |
| 3P+⊕ | 100 | 107 | 124 | 84 | 55 | 107 | 82 | 45 | 94 | 77 | 85 |
| 3P+N+⊕ | 100 | 107 | 124 | 84 | 55 | 107 | 82 | 45 | 94 | 77 | 85 |
| 125A 2P+⊕ | 130 | 130 | 143 | 94 | 87 | 119 | 102 | 56 | 112 | 104 | 104 |
| 3P+⊕ | 130 | 130 | 143 | 94 | 87 | 119 | 102 | 56 | 112 | 104 | 104 |
| 3P+N+⊕ | 130 | 130 | 143 | 94 | 87 | 119 | 102 | 56 | 112 | 104 | 104 |