

Part number

PK 3265 PB5



Interlocked switched socket-outlet, PK series,
3 poles + N + PE, 6 h (red), 32 A, 200/346 ÷
240/415 V, E33 - DIII fuse carrier


| Product description | | Material properties | |
|--|------------------------------------|--------------------------------------|--|
| Product type | Interlocked switched socket-outlet | Colour | RAL 7035 grey, RAL 3000 red |
| Series | PK..PB5 | | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| N. of poles | 3 poles + N + | RoHs conformity | 6(c): copper alloy containing up to 4% lead by weight |
| Clock position | 6 | China RoHs - EFUP | 50 |
| Specification | E33 - DIII fuse carrier | REACH SVHC substances | Yes Lead |
| Technical data | | SCIP number | F6799547-ab84-42f2-938f-233ba663766d |
| Current | 32 A | Approvals / Standards | |
| Voltage | 200/346 ÷ 240/415 V | Reference standard | EN 60309-1, -2 e -4 |
| IP degree of protection | IP55 | General ordering information | |
| Further technical details | | EAN13 code | 8015747081658 |
| Weight | 3.400,00 g | Packaging Information | |
| Operating temperature range (min, max) | -25°C ... +40°C | Packaging length | 400,00 mm |
| IK rating (impact degree of protection) | IK10 | Packaging height | 310,00 mm |
| | | Packaging width | 670,00 mm |
| | | Packaging weight | 29,60 kg |
| | | Packaging volume | 83,08 dm ³ |
| | | Packaging description | Carton box |
| | | Packaging quantity | 8 Pcs |
| | | Packaging EAN code | 8015747081665 |
| | | Sub-packaging length | 150,00 mm |
| | | Sub-packaging height | 140,00 mm |
| | | Sub-packaging width | 380,00 mm |
| | | Sub-packaging weight | 3,70 kg |
| | | Sub-packaging volume | 7,98 dm ³ |
| | | Sub-packaging description | Carton box |
| | | Sub-packaging quantity | 1 Pcs |
| | | Sub-packaging EAN barcode | 8015747081672 |

Part number

PK 3265 PB5



Catalogue drawings

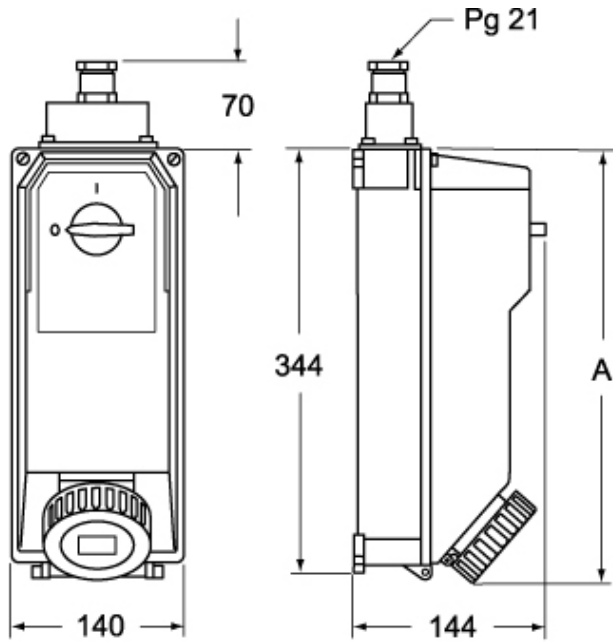

| | A |
|---------------|------------|
| 2P+⊕ | 363 |
| 3P+⊕ | 370 |
| 3P+N+⊕ | 370 |