

Part number

# PK 6344 PB5



Interlocked switched socket-outlet, PK series,  
3 poles + PE, 4 h (yellow), 63 A, 100 ÷ 130 V,  
E33 - DIII fuse carrier


| Product description                                |                                    | Material properties          |  |
|--|------------------------------------|------------------------------|--|
| <b>Product type</b>                                | Interlocked switched socket-outlet | <b>Colour</b>                | RAL 7035 grey, RAL 1021 yellow   |
| <b>Series</b>                                      | PK..PB5                            |                              | Compliant with exemption<br>6(c): copper alloy containing up to 4% lead by<br>weight |
| <b>N. of poles</b>                                 | 3 poles +                          | <b>RoHs conformity</b>       | 6(c): copper alloy containing up to 4% lead by<br>weight                             |
| <b>Clock position</b>                              | 4                                  | <b>China RoHs - EFUP</b>     | 50   |
| <b>Specification</b>                               | E33 - DIII fuse carrier            | <b>REACH SVHC substances</b> | Yes<br>Lead  |
| Technical data                                     |                                    | <b>SCIP number</b>           | F6799547-ab84-42f2-938f-233ba663766d   |
| <b>Current</b>                                     | 63 A                               | Approvals / Standards        |  |
| <b>Voltage</b>                                     | 100 ÷ 130 V                        | <b>Reference standard</b>    | EN 60309-1, -2 e -4  |
| <b>IP degree of protection</b>                     | IP55                               | General ordering information |  |
| Further technical details                          |                                    | <b>EAN13 code</b>            | 8015747082297  |
| <b>Weight</b>                                      | 3.600,00 g                         | Packaging Information        |  |
| <b>Operating temperature<br/>range (min, max)</b>  | -25°C ... +40°C                    | <b>Packaging length</b>      | 400,00 mm  |
| <b>IK rating (impact degree of<br/>protection)</b> | IK10                               | <b>Packaging height</b>      | 165,00 mm  |
|  |                                    | <b>Packaging width</b>       | 170,00 mm  |
|  |                                    | <b>Packaging weight</b>      | 4,10 kg  |
|  |                                    | <b>Packaging volume</b>      | 11,22 dm <sup>3</sup>  |
|  |                                    | <b>Packaging description</b> | Carton box   |
|  |                                    | <b>Packaging quantity</b>    | 1 Pcs  |
|  |                                    | <b>Packaging EAN code</b>    | 8015747082303  |

Part number

# PK 6344 PB5



## Catalogue drawings

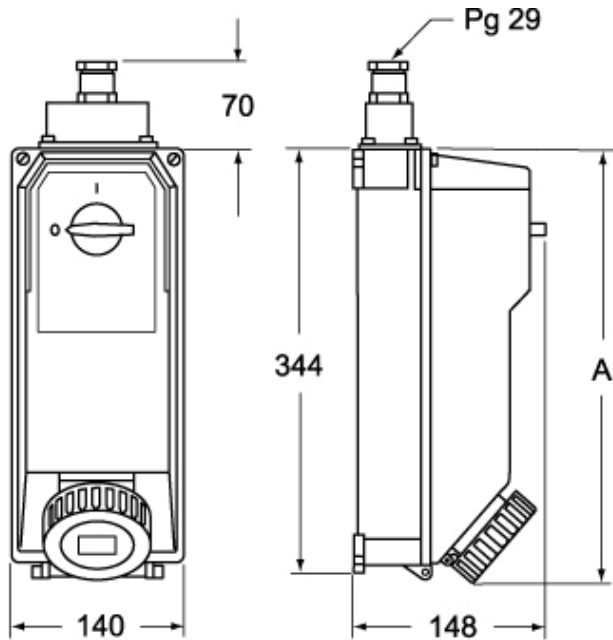

|               | <b>A</b> |
|---------------|----------|
| <b>2P+⊕</b>   | 360      |
| <b>3P+⊕</b>   | 360      |
| <b>3P+N+⊕</b> | 382      |