

Part number

# PK 6364 PB5



Interlocked switched socket-outlet, PK series,  
3 poles + PE, 6 h (red), 63 A, 380 ÷ 415 V,  
E33 - DIII fuse carrier

#### Product description

|                       |                                    |
|-----------------------|------------------------------------|
| <b>Product type</b>   | Interlocked switched socket-outlet |
| <b>Series</b>         | PK..PB5                            |
| <b>N. of poles</b>    | 3 poles +                          |
| <b>Clock position</b> | 6                                  |
| <b>Specification</b>  | E33 - DIII fuse carrier            |

#### Technical data

|                                |             |
|--------------------------------|-------------|
| <b>Current</b>                 | 63 A        |
| <b>Voltage</b>                 | 380 ÷ 415 V |
| <b>IP degree of protection</b> | IP55        |

#### Further technical details

|  |                 |
|--|-----------------|
| <b>Weight</b>                                  | 4.000,00 g      |
| <b>Operating temperature range (min, max)</b>  | -25°C ... +40°C |
| <b>IK rating (impact degree of protection)</b> | IK10            |

#### Material properties

|                              |  |
|------------------------------|--|
| <b>Colour</b>                | RAL 7035 grey, RAL 3000 red  |
| <b>RoHs conformity</b>       | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| <b>China RoHs - EFUP</b>     | 50   |
| <b>REACH SVHC substances</b> | Yes<br>Lead  |
| <b>SCIP number</b>           | F6799547-ab84-42f2-938f-233ba663766d   |

#### Approvals / Standards

|                           |                     |
|---------------------------|---------------------|
| <b>Reference standard</b> | EN 60309-1, -2 e -4 |
|---------------------------|---------------------|

#### General ordering information

|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747082563 |
|-------------------|---------------|

#### Packaging Information


|                              |                       |
|------------------------------|-----------------------|
| <b>Packaging length</b>      | 400,00 mm             |
| <b>Packaging height</b>      | 165,00 mm             |
| <b>Packaging width</b>       | 170,00 mm             |
| <b>Packaging weight</b>      | 4,17 kg               |
| <b>Packaging volume</b>      | 11,22 dm <sup>3</sup> |
| <b>Packaging description</b> | Carton box            |
| <b>Packaging quantity</b>    | 1 Pcs                 |
| <b>Packaging EAN code</b>    | 8015747082570         |

Part number

# PK 6364 PB5



## Catalogue drawings

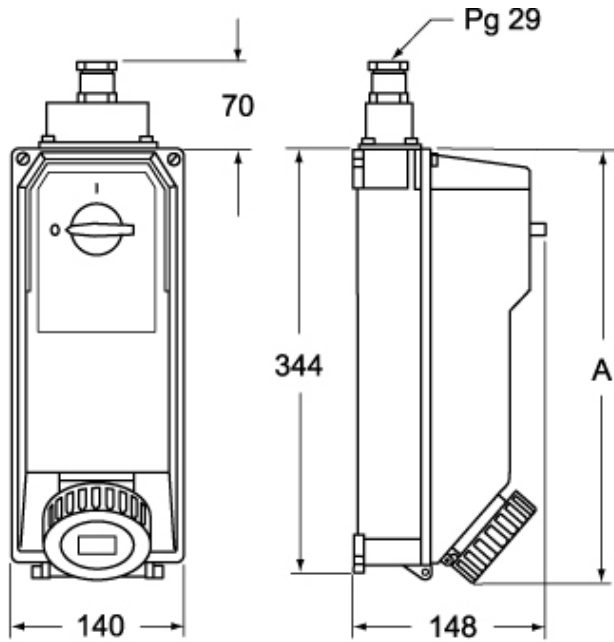

|               | <b>A</b> |
|---------------|----------|
| <b>2P+⊕</b>   | 360      |
| <b>3P+⊕</b>   | 360      |
| <b>3P+N+⊕</b> | 382      |