


Part number

SQE 1633.5



Interlocked switched socket-outlet, SQE series, 2 poles + PE, 3 h (white), 16 A, 50 ÷ 250 V, without fuse-carrier

Product description

| | |
|-----------------------|---|
| Product type | Interlocked switched socket-outlet |
| Series | SQE |
| N. of poles | 2 poles +  |
| Clock position | 3 |
| Specification | Without fuse-carrier |

Technical data

| | |
|--------------------------------|--------------|
| Current | 16 A |
| Voltage | > 50 ÷ 250 V |
| IP degree of protection | IP55 |

Further technical details

| | |
|--|-----------------|
| Operating temperature range (min, max) | -25°C ... +40°C |
| IK rating (impact degree of protection) | IK08 |

Material properties

| | |
|---------------|-------------------------------|
| Colour | RAL 7035 grey, RAL 9010 white |
|---------------|-------------------------------|

Approvals / Standards

| | |
|---------------------------|---------------------|
| Reference standard | EN 60309-1, -2 e -4 |
|---------------------------|---------------------|

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747159845 |
|-------------------|---------------|

Part number


SQE 1633.5



Catalogue drawings



Catalogue drawings

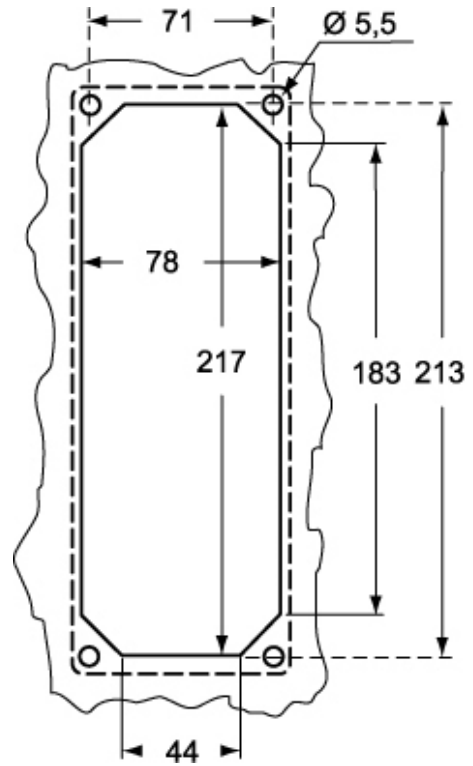

| SQE.5 | | A |
|-------|--------|----|
| 16A | 2P+⊕ | 67 |
| | 3P+⊕ | 67 |
| | 3P+N+⊕ | 70 |