


Part number

TM 1643 SIS



Interlocked switched socket-outlet, TM series, 2 poles + PE, 4 h (yellow), 16 A, 100 ÷ 130 V, sectionable fuse carrier 10 x 38 mm, without base box

Product description	
Product type	Interlocked switched socket-outlet
Series	TM.. SIS/KSIS
N. of poles	2 poles + 
Clock position	4
Size	114 x 255 mm fixing distance, for assembly in single or multiple boxes
Specification	Sectionable fuse carrier 10 x 38 mm Without base box
Technical data	
Current	16 A
Voltage	100 ÷ 130 V
IP degree of protection	IP66 / IP67
Further technical details	
Weight	1.250,00 g
Operating temperature range (min, max)	-25°C ... +40°C
UL 94 flammability rating	V-2
IK rating (impact degree of protection)	IK10


Material properties	
Colour	RAL 7012 grey, RAL 1021 yellow
Approvals / Standards	
Reference standard	EN 60309-1, -2 e -4
General ordering information	
EAN13 code	8015747089616
Packaging Information	
Sub-packaging weight	1,25 kg
Sub-packaging description	Carton tray
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747108386

Part number

TM 1643 SIS



Catalogue drawings

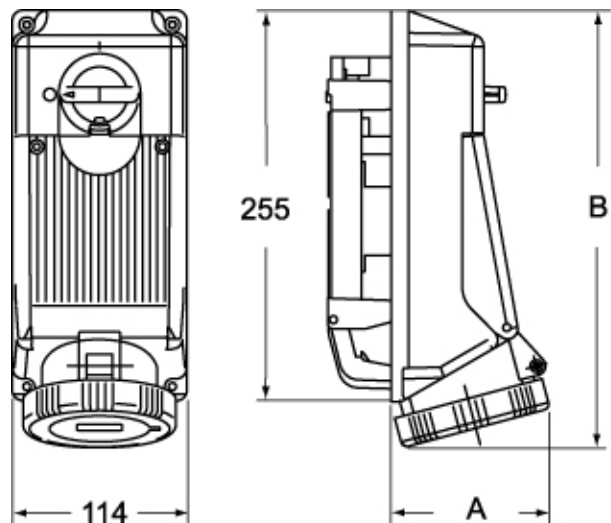

	A	B
2P+⊕	83	276
3P+⊕	85	276
3P+N+⊕	90	277