

Part number

# TM 1643 SP



Interlocked switched socket-outlet, TM series,  
2 poles + PE, 4 h (yellow), 16 A, 100 ÷ 130 V,  
without fuse-carrier, with base box



| Product description                     |                                                                                             | Material properties          |                                                                                |
|-----------------------------------------|---------------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------|
| Product type                            | Interlocked switched socket-outlet                                                          | Colour                       | RAL 7012 grey, RAL 1021 yellow                                                 |
| Series                                  | TM..SP/KSP                                                                                  | RoHs conformity              | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| N. of poles                             | 2 poles +  | China RoHs - EFUP            | 50                                                                             |
| Clock position                          | 4                                                                                           | REACH SVHC substances        | Yes                                                                            |
| Size                                    | 115 x 450 x 18 mm                                                                           | Lead                         | Lead                                                                           |
| Specification                           | Without fuse-carrier<br>With base box                                                       | SCIP number                  | Ce861c8d-b979-403b-96d9-80aef6dc281d                                           |
| Technical data                          |                                                                                             | Approvals / Standards        |                                                                                |
| Current                                 | 16 A                                                                                        | Reference standard           | EN 60309-1, -2 e -4                                                            |
| Voltage                                 | 100 ÷ 130 V                                                                                 | General ordering information |                                                                                |
| IP degree of protection                 | IP66 / IP67                                                                                 | EAN13 code                   | 8015747100366                                                                  |
| Further technical details               |                                                                                             | Packaging Information        |                                                                                |
| Weight                                  | 1.315,00 g                                                                                  | Packaging weight             | 12,44 kg                                                                       |
| Operating temperature range (min, max)  | -25°C ... +40°C                                                                             | Packaging volume             | 52,36 dm³                                                                      |
| UL 94 flammability rating               | V-2                                                                                         | Packaging description        | Carton box                                                                     |
| IK rating (impact degree of protection) | IK10                                                                                        | Packaging quantity           | 9 Pcs                                                                          |
|                                         |                                                                                             | Packaging EAN code           | 8015747115971                                                                  |
|                                         |                                                                                             | Sub-packaging weight         | 1,38 kg                                                                        |
|                                         |                                                                                             | Sub-packaging description    | Plastic packaging                                                              |
|                                         |                                                                                             | Sub-packaging quantity       | 1 Pcs                                                                          |
|                                         |                                                                                             | Sub-packaging EAN barcode    | 8015747115988                                                                  |

Part number

# TM 1643 SP



Catalogue drawings

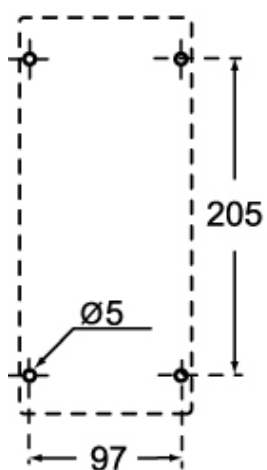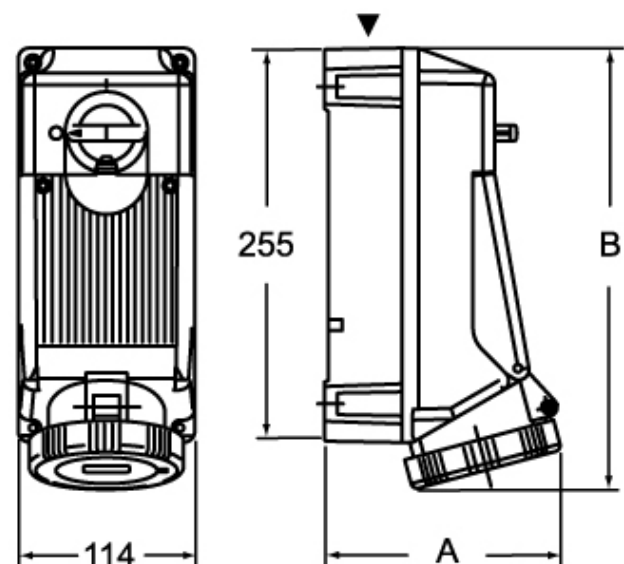

|               | <b>A</b> | <b>B</b> |
|---------------|----------|----------|
| <b>2P+⊕</b>   | 133      | 276      |
| <b>3P+⊕</b>   | 135      | 276      |
| <b>3P+N+⊕</b> | 140      | 277      |