


Part number

BK 32123



Interlocked switched socket-outlet, BK series, 2 poles + PE, 12 h (white), 32 A, sectionable fuse carrier 10 x 38 mm

Product description	
Product type	Interlocked switched socket-outlet
Series	BK
N. of poles	2 poles + 
Clock position	12
Specification	Sectionable fuse carrier 10 x 38 mm
Technical data	
Current	32 A
Voltage	ins. transformer
IP degree of protection	IP67
Further technical details	
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK10


Material properties	
Colour	RAL 7035 grey, RAL 9010 white
Approvals / Standards	
Reference standard	EN 60309-1, -2 e -4
General ordering information	
EAN13 code	8015747147163

Part number

BK 32123



Catalogue drawings

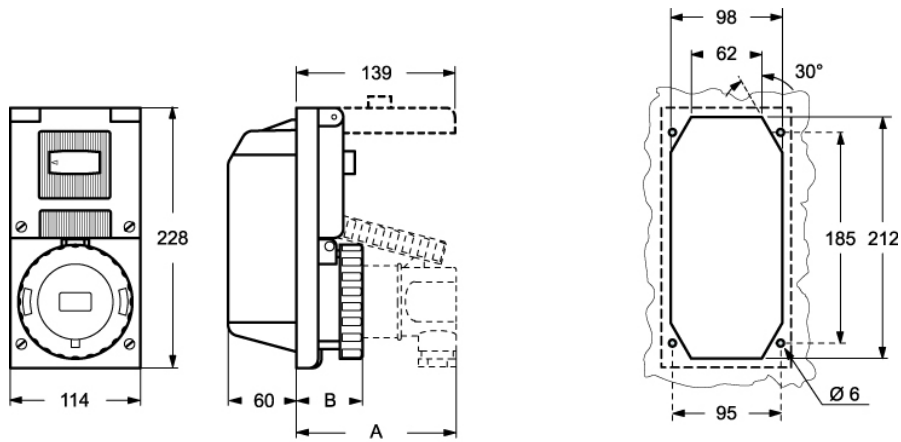

BK		A	B
16A	2P + ⊕	105	50
	3P + ⊕	105	50
	3P + N + ⊕	110	50
32A	2P + ⊕	140	58
	3P + ⊕	140	58
	3P + N + ⊕	140	58