

Part number

# BK 3225



Interlocked switched socket-outlet, BK series,  
3 poles + N + PE, 2 h (green), 32 A, > 50 V,  
sectionable fuse carrier 10 x 38 mm

| Product description                     |                                                                                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------|
| Product type                            | Interlocked switched socket-outlet                                                              |
| Series                                  | BK                                                                                              |
| N. of poles                             | 3 poles + N +  |
| Clock position                          | 2                                                                                               |
| Specification                           | Sectionable fuse carrier 10 x 38 mm                                                             |
| Technical data                          |                                                                                                 |
| Current                                 | 32 A                                                                                            |
| Voltage                                 | > 50 V                                                                                          |
| IP degree of protection                 | IP67                                                                                            |
| Further technical details               |                                                                                                 |
| Operating temperature range (min, max)  | -25°C ... +40°C                                                                                 |
| IK rating (impact degree of protection) | IK10                                                                                            |



| Material properties          |                     |
|------------------------------|---------------------|
| Colour                       | RAL 7035 grey       |
| Approvals / Standards        |                     |
| Reference standard           | EN 60309-1, -2 e -4 |
| General ordering information |                     |
| EAN13 code                   | 8015747147187       |

Part number

**BK 3225**



Catalogue drawings

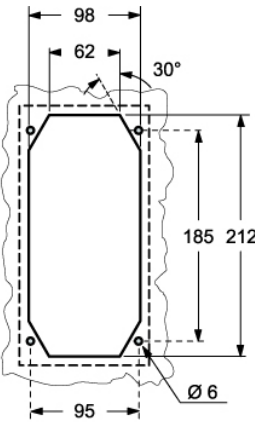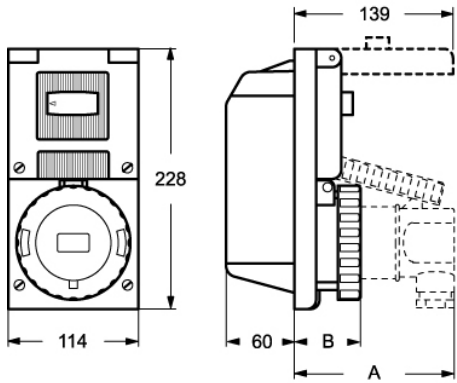

| BK  |            | A   | B  |
|-----|------------|-----|----|
| 16A | 2P + ⊕     | 105 | 50 |
|     | 3P + ⊕     | 105 | 50 |
|     | 3P + N + ⊕ | 110 | 50 |
| 32A | 2P + ⊕     | 140 | 58 |
|     | 3P + ⊕     | 140 | 58 |
|     | 3P + N + ⊕ | 140 | 58 |