

Part number

C30MA 120 P



Male crimp contact, C30 series, 300 A, turned silver plated, wire cross section 120 mm², AWG 4/0, finger-proof version

Product description

Product type	Crimp contact
Series	C30
Gender	Male
Specification	Finger-proof version

Technical data

Current	300 A
Contact type	Turned silver plated

Further technical details

Contact resistance	≤ 0,2 mΩ
Weight	46,80 g
Conductors stripping length	22,5 mm

Material properties

Main material	Copper alloy
Other materials	Cap: polycarbonate (PC)
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead

General ordering information

EAN13 code	8015747016902
-------------------	---------------

Packaging Information


Packaging length	112,00 mm
Packaging height	95,00 mm
Packaging width	117,00 mm
Packaging volume	1,24 dm ³
Packaging description	Carton box
Packaging quantity	40 Pcs
Packaging EAN code	8015747017060
Sub-packaging description	Plastic box
Sub-packaging quantity	5 Pcs
Sub-packaging EAN barcode	8015747290999

Part number

C30MA 120 P



Catalogue drawings

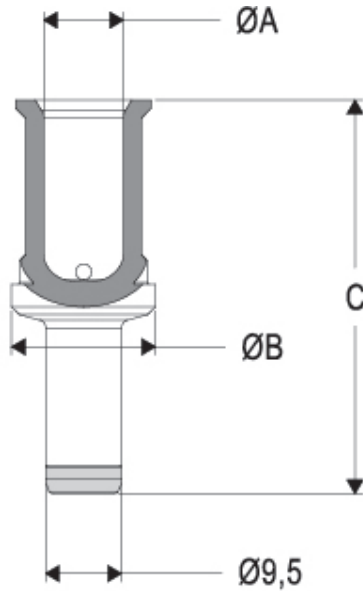

C30MA..P contacts

conductor section (mm ²)	conductor slot $\varnothing A$ (mm)	$\varnothing B$ (mm)	C (mm)	conductor stripping length (mm)
16	5,5	18	42,7	19
25	7	18	42,7	19
35	8,2	18	43,7	20
50	10	18	49,2	22,5
70	11,5	18	49,2	22,5
95	13,5	21	49,2	22,5
120	15,5	21	49,2	22,5