


Part number

CQEYF 32



Female insert, CQEY series, AXYR® spring push-in terminal connection without tools, 32 poles + PE, 16 A 500 V 6 kV 3, size "77.27"

| Product description | |
|---|---|
| Product type | Insert |
| Series | CQEY |
| Connection type | AXYR® high density spring terminal connection without tools |
| Gender | Female |
| N. of poles | 32 poles +  |
| Size | Size 77.27 |
| Technical data | |
| Current | 16 A |
| Voltage | 500 V |
| Rated impulse withstand voltage | 6 kV |
| Pollution degree | 3 |
| Rated voltage according to UL/CSA | 600 V |
| Contact type | Turned silver plated |
| IP degree of protection | IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure |
| Further technical details | |
| Characteristics according to EN 61984 | 16 A 500 V 6 kV 3 |
| Mating cycles | ≥ 500 |
| Insulation resistance | ≥ 10 GΩ |
| Contact resistance | ≤ 3 mΩ |
| Weight | 123,00 g |
| Operating temperature range (min, max) | -40 °C ... +125 °C |
| Conductors stripping length | 9...11 mm |
| UL 94 flammability rating | V-0 |


| Material properties | |
|----------------------------------|--|
| Main material | Polycarbonate (PC) |
| Other materials | Contacts: copper alloy |
| Colour | RAL 7032 grey |
| RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| China RoHs - EFUP | 50 |
| REACH SVHC substances | Yes Lead |
| General ordering information | |
| EAN13 code | 8015747293099 |
| eCl@ss 8.1 | 27440205 |
| ETIM 7.0 | EC000438 |
| Packaging Information | |
| Packaging length | 245,00 mm |
| Packaging height | 165,00 mm |
| Packaging width | 215,00 mm |
| Packaging weight | 3,95 kg |
| Packaging volume | 8,69 dm ³ |
| Packaging description | Carton box |
| Packaging quantity | 30 Pcs |
| Packaging EAN code | 8015747293105 |
| Sub-packaging weight | 0,13 kg |
| Sub-packaging description | Plastic bag |
| Sub-packaging quantity | 1 Pcs |
| Sub-packaging EAN barcode | 8015747293655 |

Part number

CQEYF 32



Catalogue drawings

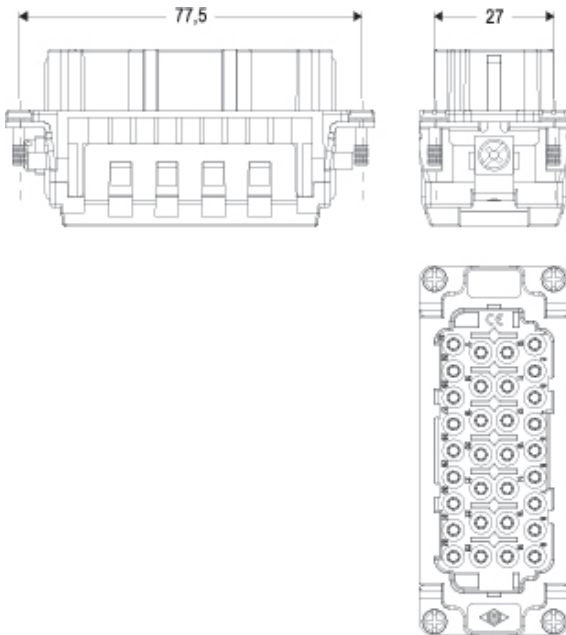

Derating curves

CQEY 32 poles connector inserts Maximum current load derating diagram

