

Part number

# CQM 04/2E



Male insert, CQ series, crimp connection, 4 + 2 poles + PE, 40 A 400/690 V 6 kV 3 / 10 A 250 V 4 kV 3, size "32.13", with PE plate


Product description		Material properties	
<b>Product type</b>	Insert	<b>Main material</b>	Polycarbonate (PC)
<b>Series</b>	CQ	<b>Colour</b>	RAL 7032 grey
<b>Connection type</b>	Crimp connection	<b>RoHs conformity</b>	Compliant
<b>Gender</b>	Male	<b>China RoHs - EFUP</b>	E
<b>N. of poles</b>	4 poles +	<b>REACH SVHC substances</b>	No
<b>Auxiliary poles</b>	2 poles	<b>General ordering information</b>	
<b>Size</b>	Size "32.13"	<b>EAN13 code</b>	8015747292382
<b>Technical data</b>		<b>eCl@ss 8.1</b>	27440205
<b>Current</b>	40 A	<b>ETIM 7.0</b>	EC000438
<b>Voltage</b>	400 - 600 V	<b>Packaging Information</b>	
<b>Rated impulse withstand voltage</b>	6 kV	<b>Packaging length</b>	245,00 mm
<b>Pollution degree</b>	3	<b>Packaging height</b>	165,00 mm
<b>Rated voltage according to UL/CSA</b>	600 V	<b>Packaging width</b>	215,00 mm
<b>IP degree of protection</b>	IP20 without enclosure, IP66/IP67/IP69 with enclosure	<b>Packaging weight</b>	1,43 kg
<b>Further technical details</b>		<b>Packaging volume</b>	8,69 dm <sup>3</sup>
<b>Characteristics according to EN 61984</b>	40 A 400/690 V 6 kV 3 (aux: 10 A 250 V 4k V 3)	<b>Packaging description</b>	Carton box
<b>Mating cycles</b>	≥ 500	<b>Packaging quantity</b>	50 Pcs
<b>Insulation resistance</b>	≥ 10 GΩ	<b>Packaging EAN code</b>	8015747292399
<b>Contact resistance</b>	≤ 0,3 mΩ (4 P), ≤ 3 mΩ (2 P)	<b>Sub-packaging weight</b>	0,03 kg
<b>Weight</b>	24,67 g	<b>Sub-packaging description</b>	Plastic bag
<b>Operating temperature range (min, max)</b>	-40 °C ... +125 °C	<b>Sub-packaging quantity</b>	1 Pcs
<b>UL 94 flammability rating</b>	V-0	<b>Sub-packaging EAN barcode</b>	8015747300247

Part number

# CQM 04/2E



## Catalogue drawings

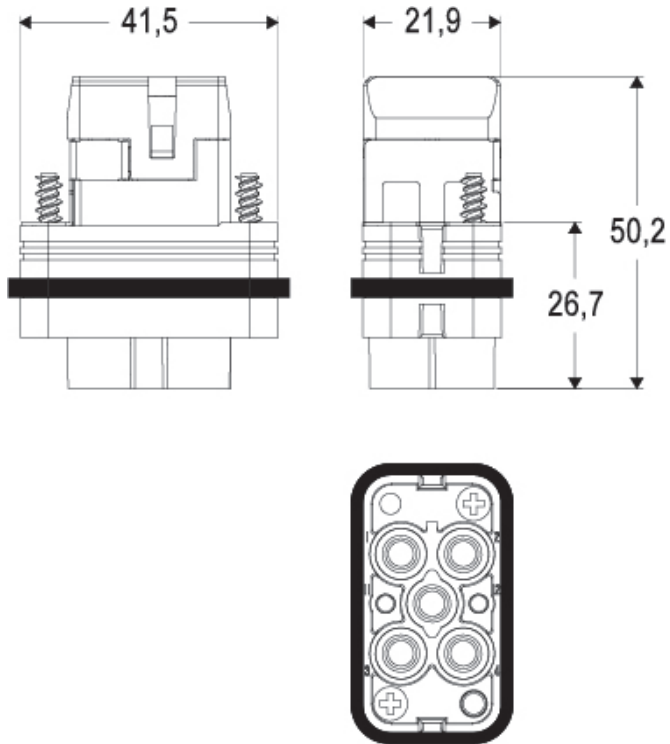

## Derating curves

**CQ 04/2E, 04/2 power poles connector inserts**  
**Maximum current load derating diagram**

