

Part number

CXMA 1.5



Male crimp contact, CX series, 40 A, turned silver plated, wire cross section 1,5 mm², AWG 16


| Product description | | Material properties | |
|------------------------------------|----------------------|----------------------------------|-------------------------------------------------------|
| Product type | Crimp contact | Main material | Copper alloy |
| Series | CX | | Compliant with exemption |
| Gender | Male | RoHs conformity | 6(c): copper alloy containing up to 4% lead by weight |
| Technical data | | China RoHs - EFUP | 50 |
| Current | 40 A | REACH SVHC substances | Yes Lead |
| Wire cross-section | 1,50 mm ² | SCIP number | C0979fba-9907-458f-a94a-db781440f273 |
| AWG size | 16 | Approvals / Standards | |
| Contact type | Turned silver plated | Certifications | CSA, EAC |
| Further technical details | | UL | ECBT2 |
| Weight | 3,00 g | cUL | ECBT8 |
| Conductors stripping length | 9 mm | General ordering information | |
| | | EAN13 code | 8015747042758 |
| | | eCl@ss 8.1 | 27440204 |
| | | ETIM 7.0 | EC000796 |
| | | Packaging Information | |
| | | Packaging length | 112,00 mm |
| | | Packaging height | 95,00 mm |
| | | Packaging width | 117,00 mm |
| | | Packaging weight | 1,39 kg |
| | | Packaging volume | 1,24 dm ³ |
| | | Packaging description | Carton box |
| | | Packaging quantity | 400 Pcs |
| | | Packaging EAN code | 8015747207072 |
| | | Sub-packaging length | 50,00 mm |
| | | Sub-packaging height | 44,00 mm |
| | | Sub-packaging width | 50,00 mm |
| | | Sub-packaging weight | 0,17 kg |
| | | Sub-packaging volume | 0,11 dm ³ |
| | | Sub-packaging description | Plastic box |
| | | Sub-packaging quantity | 50 Pcs |
| | | Sub-packaging EAN barcode | 8015747042765 |

Part number

CXMA 1.5



Catalogue drawings

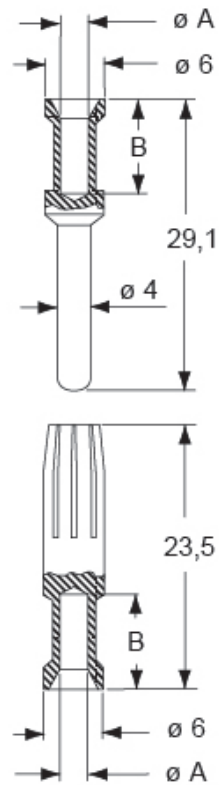

CXF and CXM contacts

| conductor cross-sectional area (mm ²) | conductor slot $\varnothing A$ (mm) | conductor stripping length B (mm) |
|---------------------------------------------------|-------------------------------------|-----------------------------------|
| 1,5 | 1,8 | 9 |
| 2,5 | 2,2 | 9 |
| 4 | 2,85 | 9,6 |
| 6 | 3,5 | 9,6 |
| 10 | 4,3 | 15 |