

Part number

MKAXE IAF20



Angled Bulkhead mounting housing, E-Xtreme® C-TYPE series, with 1 lever, M20 fixing thread, size "21.21"

Product description

| | |
|---------------------|----------------------------------|
| Product type | Angled bulkhead mounting housing |
| Series | E-Xtreme® C-TYPE |
| Closing type | With 1 lever |
| Size | Size "21.21" |
| Cable entry | Round threaded appendix M20 |

Technical data

IP degree of protection IP44 - IP66 / IP67 / IP69 with CKR 65 (D)

Further technical details

Operating temperature range (min, max) -40°C...+125°C

Material properties

| | |
|------------------------------|------------------------|
| Main material | Zinc die-cast |
| Other materials | Lever: Stainless steel |
| Colour | RAL 7040 grey |
| RoHs conformity | Compliant |
| China RoHs - EFUP | E |
| REACH SVHC substances | No |

Approvals / Standards

| | |
|-----------------------|---------|
| Certifications | DNV, BV |
| UL | ECBT2 |
| cUL | ECBT8 |

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747244503 |
| eCl@ss 8.1 | 27440202 |
| ETIM 7.0 | EC000437 |

Packaging Information


| | |
|----------------------------------|----------------------|
| Sub-packaging length | 185,00 mm |
| Sub-packaging height | 40,00 mm |
| Sub-packaging width | 155,00 mm |
| Sub-packaging volume | 1,15 dm ³ |
| Sub-packaging description | Carton box |
| Sub-packaging quantity | 10 Pcs |
| Sub-packaging EAN barcode | 8015747244510 |

Part number

MKAXE IAF20



Catalogue drawings

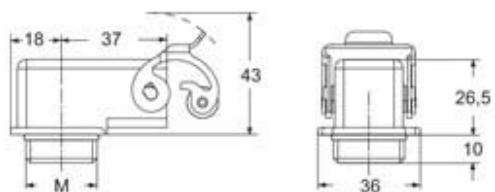

Catalogue drawings

