


Part number

PEW 12565 PI



Flush-mounting socket outlet, PLUSO series, 3 poles + N + PE, 6 h (red), 125 A, 380 ÷ 415 V, inclined

Product description

| | |
|------------------------|---|
| Product type | Socket Flush-mounting |
| Series | PEW...PI, PLUSO |
| Connection type | Screw terminal connection |
| N. of poles | 3 poles + N +  |
| Clock position | 6 |
| Specification | Inclined |

Technical data

| | |
|---|-----------------|
| Current | 125 A |
| Voltage | 380 ÷ 415 V |
| IP degree of protection | IP67 |
| Further technical details | |
| Weight | 1.680,00 g |
| Operating temperature range (min, max) | -25°C ... +40°C |

Material properties

| | |
|------------------------------|--|
| Colour | RAL 7035 grey, RAL 3000 red |
| RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| China RoHs - EFUP | 50 |
| REACH SVHC substances | Yes Lead |
| SCIP number | Ca7de37f-add8-4b77-9861-279c94903ade |

Approvals / Standards

| | |
|---------------------------|-------------------|
| Reference standard | EN 60309-1 and -2 |
|---------------------------|-------------------|

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747070522 |
|-------------------|---------------|

Packaging Information

| | |
|----------------------------------|-----------------------|
| Packaging length | 335,00 mm |
| Packaging height | 320,00 mm |
| Packaging width | 400,00 mm |
| Packaging weight | 14,76 kg |
| Packaging volume | 42,88 dm ³ |
| Packaging description | Carton box |
| Packaging quantity | 8 Pcs |
| Packaging EAN code | 8015747099219 |
| Sub-packaging weight | 1,85 kg |
| Sub-packaging description | Carton box |
| Sub-packaging quantity | 1 Pcs |
| Sub-packaging EAN barcode | 8015747099226 |


Part number

PEW 12565 PI



Catalogue drawings

(63 /125A) PEW ... PI

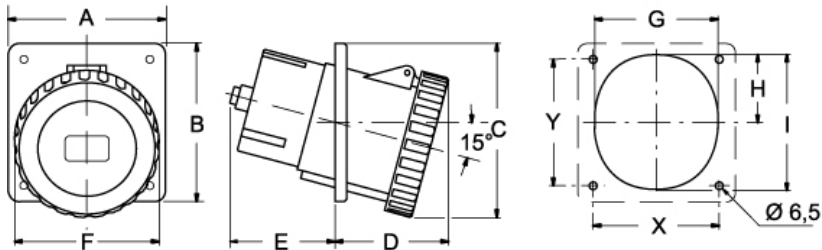

| PEW ... PI | A | B | C | D | E | F | G | H | I | X | Y |
|------------------|-----|-----|-----|----|----|-----|-----|----|-----|-----|-----|
| 63A 2P+⊕ | 100 | 107 | 124 | 84 | 55 | 107 | 82 | 45 | 94 | 77 | 85 |
| 3P+⊕ | 100 | 107 | 124 | 84 | 55 | 107 | 82 | 45 | 94 | 77 | 85 |
| 3P+N+⊕ | 100 | 107 | 124 | 84 | 55 | 107 | 82 | 45 | 94 | 77 | 85 |
| 125A 2P+⊕ | 130 | 130 | 143 | 94 | 87 | 119 | 102 | 56 | 112 | 104 | 104 |
| 3P+⊕ | 130 | 130 | 143 | 94 | 87 | 119 | 102 | 56 | 112 | 104 | 104 |
| 3P+N+⊕ | 130 | 130 | 143 | 94 | 87 | 119 | 102 | 56 | 112 | 104 | 104 |