


Part number

PEW 63114 PV



Mobile socket outlet, PLUSO series, 3 poles + PE, 11 h (red), 63 A, 440 ÷ 460 V

| Product description | | Material properties | |
|---|---|------------------------------|---|
| Product type | Socket Mobile | Colour | RAL 7035 grey, RAL 3000 red |
| Series | PEW...PV, PLUSO | RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| N. of poles | 3 poles +  | China RoHs - EFUP | 50 |
| Clock position | 11 | REACH SVHC substances | Yes Lead |
| Technical data | | SCIP number | Ca7de37f-add8-4b77-9861-279c94903ade |
| Current | 63 A | Approvals / Standards | |
| Voltage | 440 ÷ 460 V | Reference standard | EN 60309-1 and -2 |
| IP degree of protection | IP67 | General ordering information | |
| Further technical details | | EAN13 code | 8015747076531 |
| Weight | 915,00 g | Packaging Information | |
| Operating temperature range (min, max) | -25°C ... +40°C | Packaging length | 300,00 mm |
| | | Packaging height | 130,00 mm |
| | | Packaging width | 200,00 mm |
| | | Packaging weight | 1,92 kg |
| | | Packaging volume | 7,80 dm ³ |
| | | Packaging description | Carton box |
| | | Packaging quantity | 2 Pcs |
| | | Packaging EAN code | 8015747076548 |


Part number

PEW 63114 PV



Catalogue drawings

(63 / 125A) PEW ... PV

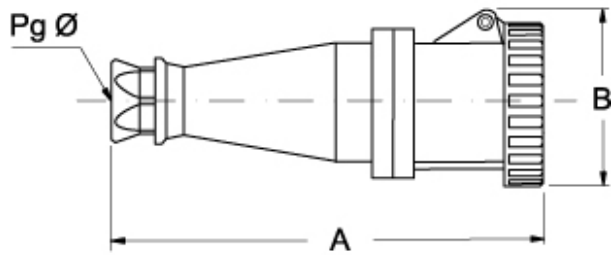

| PEW ... PV | | A | B | Pg Ø |
|-------------|--------|-----|-------|--------|
| 63A | 2P+⊕ | 277 | 108,5 | 36 |
| | 3P+⊕ | 277 | 108,5 | 36 |
| | 3P+N+⊕ | 277 | 108,5 | 36 |
| 125A | 2P+⊕ | 324 | 120,5 | 2" gas |
| | 3P+⊕ | 324 | 120,5 | 2" gas |
| | 3P+N+⊕ | 324 | 120,5 | 2" gas |