

Part number

# TM 32104 IS



Interlocked switched socket-outlet, TM series, 3 poles + PE, 10 h (green), 32 A, > 50 V, sectionable fuse carrier 14 x 51 mm, with base box

| Product description                     |                                                                                             |
|-----------------------------------------|---------------------------------------------------------------------------------------------|
| Product type                            | Interlocked switched socket-outlet                                                          |
| Series                                  | TM.. IS/KIS                                                                                 |
| N. of poles                             | 3 poles +  |
| Clock position                          | 10                                                                                          |
| Specification                           | Sectionable fuse carrier 14 x 51 mm<br>With base box                                        |
| Technical data                          |                                                                                             |
| Current                                 | 32 A                                                                                        |
| Voltage                                 | > 50 V                                                                                      |
| IP degree of protection                 | IP66 / IP67                                                                                 |
| Further technical details               |                                                                                             |
| Operating temperature range (min, max)  | -25°C ... +40°C                                                                             |
| UL 94 flammability rating               | V-2                                                                                         |
| IK rating (impact degree of protection) | IK10                                                                                        |



| Material properties          |                               |
|------------------------------|-------------------------------|
| Colour                       | RAL 7012 grey, RAL 6017 green |
| Approvals / Standards        |                               |
| Reference standard           | EN 60309-1, -2 e -4           |
| General ordering information |                               |
| EAN13 code                   | 8015747161824                 |

Part number

# TM 32104 IS



Catalogue drawings

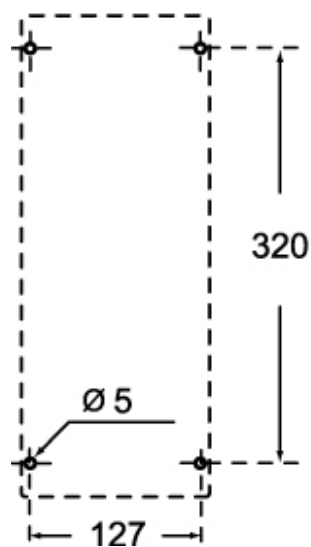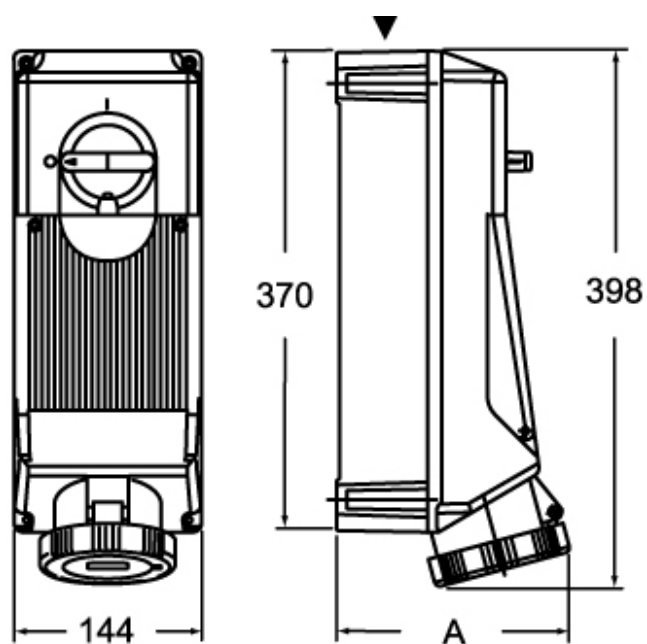

|               | <b>A</b>   |
|---------------|------------|
| <b>2P+⊕</b>   | <b>162</b> |
| <b>3P+⊕</b>   | <b>162</b> |
| <b>3P+N+⊕</b> | <b>169</b> |