



Part number

PE 1693 PQF

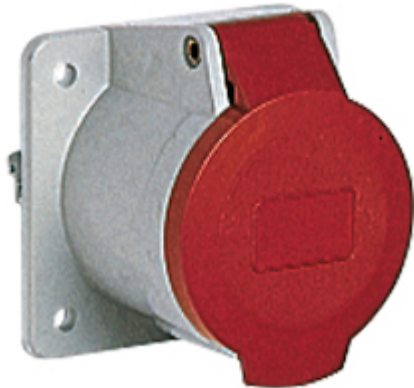

Flush-mounting socket outlet, PLUSO series, 2 poles + PE, 9 h (red), 16 A, 380 ÷ 415 V, straight, with bigger flange

| Product description | |
|---|---|
| Product type | Socket Flush-mounting |
| Series | PE...PQF, PLUSO |
| N. of poles | 2 poles +  |
| Clock position | 9 |
| Size | Socket fixing centre distance 60 x 60 mm |
| Specification | Straight, bigger flange |
| Technical data | |
| Current | 16 A |
| Voltage | 380 ÷ 415 V |
| IP degree of protection | IP44 |
| Further technical details | |
| Weight | 130,00 g |
| Operating temperature range (min, max) | -25°C ... +40°C |

| Material properties | |
|------------------------------|-----------------------------|
| Colour | RAL 7035 grey, RAL 3000 red |
| Approvals / Standards | |
| Reference standard | EN 60309-1 and -2 |
| General ordering information | |
| EAN13 code | 8015747065382 |
| Packaging Information | |
| Packaging description | Carton box |
| Packaging quantity | 10 Pcs |
| Packaging EAN code | 8015747110129 |

Part number

PE 1693 PQF



Catalogue drawings

PEW...PQ - PQF flush-mounting straight socket-outlets, low voltage from over 50V up to 690V

| 16A IP67 degree of protection | | 32A IP67 degree of protection | | 16A IP67 degree of protection | | 16A IP67 degree of protection | |
|--|--------------------------------------|--|--------------------------------------|--|--------------------------------------|--|--------------------------------------|
| | | | | | | | |
| Part No. | Colour | Part No. | Colour | Part No. | Colour | Part No. | Colour |
| PEW 1643 PQ ⊕ PEW 1663 PQ ⊕ PEW 1693 PQ ⊕ PEW 1673 PQ ⊕ PEW 16123 PQ ⊕ PEW 1623 PQ ⊕ PEW 1633 PQ ⊕ PEW 1683 PQ ⊕ | | PEW 3243 PQ ⊕ PEW 3263 PQ ⊕ PEW 3293 PQ ⊕ PEW 3273 PQ ⊕ PEW 32123 PQ ⊕ PEW 3223 PQ ⊕ PEW 3233 PQ ⊕ PEW 3283 PQ ⊕ | | PE 1643 PQF ⊕ PE 1663 PQF ⊕ PE 1693 PQF ⊕ PE 1673 PQF ⊕ PE 16123 PQF ⊕ PE 1623 PQF ⊕ PE 1633 PQF ⊕ PE 1683 PQF ⊕ | | PEW 1643 PQF ⊕ PEW 1663 PQF ⊕ PEW 1693 PQF ⊕ PEW 1673 PQF ⊕ PEW 16123 PQF ⊕ PEW 1623 PQF ⊕ PEW 1633 PQF ⊕ PEW 1683 PQF ⊕ | |
| C 52 x 52 mm | | D 60 x 60 mm | | D 60 x 60 mm | | D 60 x 60 mm | |
| PEW 1644 PQ ⊕ PEW 1694 PQ ⊕ PEW 1664 PQ ⊕ PEW 16114 PQ ⊕ PEW 1674 PQ ⊕ PEW 1654 PQ ⊕ PEW 1634 PQ ⊕ PEW 1634 PQ ⊕ PEW 16104 PQ ⊕ PEW 1624 PQ ⊕ | | PEW 3244 PQ ⊕ PEW 3294 PQ ⊕ PEW 3264 PQ ⊕ PEW 32114 PQ ⊕ PEW 3274 PQ ⊕ PEW 3254 PQ ⊕ PEW 3234 PQ ⊕ PEW 3234 PQ ⊕ PEW 32104 PQ ⊕ PEW 3224 PQ ⊕ | | PE 1644 PQF ⊕ PE 1694 PQF ⊕ PE 1664 PQF ⊕ PE 16114 PQF ⊕ PE 1674 PQF ⊕ PE 1654 PQF ⊕ PE 1634 PQF ⊕ PE 1634 PQF ⊕ PE 16104 PQF ⊕ PE 1624 PQF ⊕ | | PEW 3244 PQF ⊕ PEW 3294 PQF ⊕ PEW 3264 PQF ⊕ PEW 32114 PQF ⊕ PEW 3274 PQF ⊕ PEW 3254 PQF ⊕ PEW 3234 PQF ⊕ PEW 3234 PQF ⊕ PEW 32104 PQF ⊕ PEW 3224 PQF ⊕ | |
| G 52 x 52 mm | | D 60 x 60 mm | | D 60 x 60 mm | | D 60 x 60 mm | |
| PEW 1645 PQ ⊕ PEW 1695 PQ ⊕ PEW 1665 PQ ⊕ PEW 1675 PQ ⊕ PEW 1655 PQ ⊕ PEW 16115 PQ ⊕ PEW 1635 PQ ⊕ PEW 1635 PQ ⊕ PEW 1625 PQ ⊕ | | PEW 3245 PQ ⊕ PEW 3295 PQ ⊕ PEW 3265 PQ ⊕ PEW 3275 PQ ⊕ PEW 3255 PQ ⊕ PEW 32115 PQ ⊕ PEW 3235 PQ ⊕ PEW 3235 PQ ⊕ PEW 3225 PQ ⊕ | | | | | |
| D 60 x 60 mm | | D 60 x 60 mm | | | | | |

dimensions in mm

(16 / 32A) PEW ... PQ
(16A) PEW ... PQF

| PEW...PQ | A | B | C | D | E | H | X | Y |
|----------|----|----|-----|----|----|------|----|----|
| 16A 2P+⊕ | 85 | 85 | 77 | 52 | 27 | 60 | 52 | 52 |
| 3P+⊕ | 85 | 85 | 85 | 52 | 27 | 61,5 | 52 | 52 |
| 3P+N+⊕ | 80 | 80 | 93 | 52 | 27 | 70 | 60 | 60 |
| 32A 2P+⊕ | 80 | 80 | 98 | 62 | 28 | 68 | 60 | 60 |
| 3P+⊕ | 80 | 80 | 98 | 62 | 28 | 68 | 60 | 60 |
| 3P+N+⊕ | 80 | 80 | 105 | 62 | 28 | 73 | 60 | 60 |

| PEW ... PQF | A | B | C | D | E | H | X | Y |
|-------------|----|----|----|----|----|------|----|----|
| 16A 2P+⊕ | 80 | 80 | 77 | 52 | 27 | 60 | 60 | 60 |
| 3P+⊕ | 80 | 80 | 85 | 52 | 27 | 61,5 | 60 | 60 |