



Part number

# PE 3293 SV

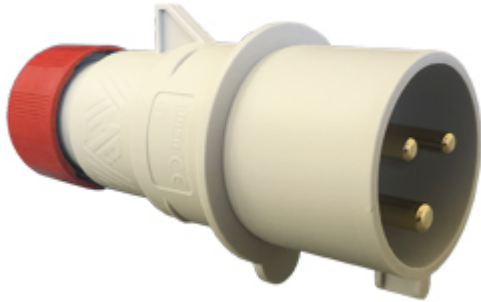

Mobile plug, PLUSO series, 2 poles + PE, 9 h (red), 32 A, 380 ÷ 415 V, straight

#### Product description

<b>Product type</b>	Plug Mobile
<b>Series</b>	PE...SV, PLUSO
<b>N. of poles</b>	2 poles + 
<b>Clock position</b>	9
<b>Specification</b>	Straight

#### Technical data

<b>Current</b>	32 A
<b>Voltage</b>	380 ÷ 415 V
<b>IP degree of protection</b>	IP44

#### Further technical details

<b>Weight</b>	174,00 g
<b>Operating temperature range (min, max)</b>	-25°C ... +40°C

#### Material properties

<b>Colour</b>	RAL 7035 grey, RAL 3000 red
<b>RoHs conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>China RoHs - EFUP</b>	50
<b>REACH SVHC substances</b>	Yes Lead
<b>SCIP number</b>	Ca7de37f-add8-4b77-9861-279c94903ade

#### Approvals / Standards

<b>Reference standard</b>	EN 60309-1 and -2
---------------------------	-------------------

#### General ordering information

<b>EAN13 code</b>	8015747068055
-------------------	---------------

#### Packaging Information

<b>Packaging length</b>	285,00 mm
<b>Packaging height</b>	170,00 mm
<b>Packaging width</b>	190,00 mm
<b>Packaging weight</b>	1,95 kg
<b>Packaging volume</b>	9,21 dm <sup>3</sup>
<b>Packaging description</b>	Carton box
<b>Packaging quantity</b>	10 Pcs
<b>Packaging EAN code</b>	8015747193627


Part number

# PE 3293 SV



Catalogue drawings

(16 / 32A) PE ... SV

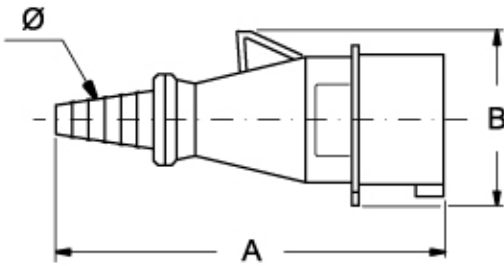

<b>PE ... SV</b>	<b>A</b>	<b>B</b>	<b><math>\emptyset</math> min</b>	<b><math>\emptyset</math> max</b>	
<b>16A</b>	2P+⊕	143,5	59	7	17
	3P+⊕	148,5	66	7	17
	3P+N+⊕	167,5	75	9	22
<b>32A</b>	2P+⊕	187	80	9	22
	3P+⊕	187	80	9	22
	3P+N+⊕	192,5	87	9	22