


Part number

# PK 16115 PB5



Interlocked switched socket-outlet, PK series,  
3 poles + N + PE, 11 h (red), 16 A, 250/440 ÷  
265/460 V, E16 fuse carrier

#### Product description

|                       |   |
|-----------------------|---|
| <b>Product type</b>   | Interlocked switched socket-outlet  |
| <b>Series</b>         | PK..PB5   |
| <b>N. of poles</b>    | 3 poles + N +  |
| <b>Clock position</b> | 11  |
| <b>Specification</b>  | E16 fuse carrier  |

#### Technical data

|                                |                     |
|--------------------------------|---------------------|
| <b>Current</b>                 | 16 A                |
| <b>Voltage</b>                 | 250/440V ÷ 265/460V |
| <b>IP degree of protection</b> | IP55                |

#### Further technical details

|  |                 |
|--|-----------------|
| <b>Operating temperature range (min, max)</b>  | -25°C ... +40°C |
| <b>IK rating (impact degree of protection)</b> | IK10            |

#### Material properties

|               |                             |
|---------------|-----------------------------|
| <b>Colour</b> | RAL 7035 grey, RAL 3000 red |
|---------------|-----------------------------|

#### Approvals / Standards

|                           |                     |
|---------------------------|---------------------|
| <b>Reference standard</b> | EN 60309-1, -2 e -4 |
|---------------------------|---------------------|

#### General ordering information



|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747158749 |
|-------------------|---------------|

Part number

# PK 16115 PB5



## Catalogue drawings

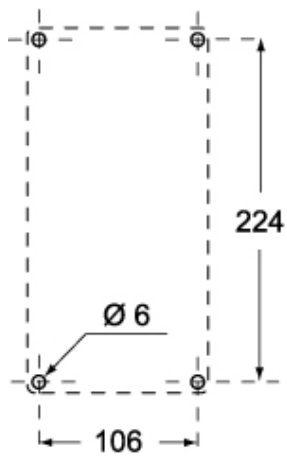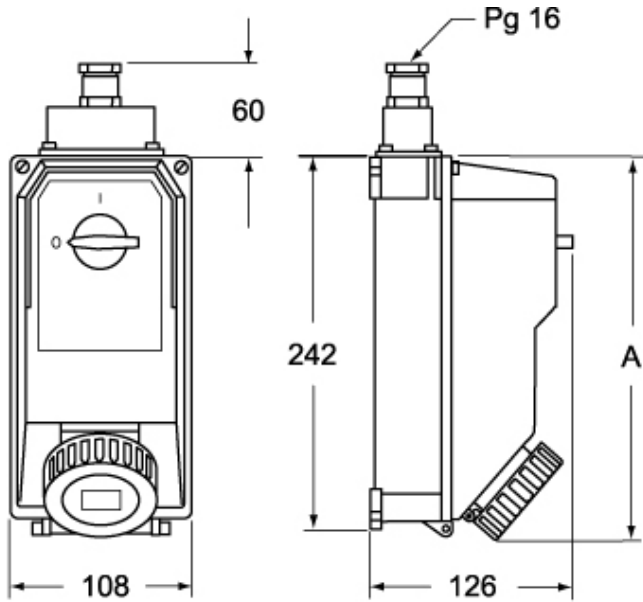

|               | <b>A</b> |
|---------------|----------|
| <b>2P+⊕</b>   | 260      |
| <b>3P+⊕</b>   | 260      |
| <b>3P+N+⊕</b> | 270      |