

Part number

# PK 3275 PB5



Interlocked switched socket-outlet, PK series,  
3 poles + N + PE, 7 h (black), 32 A, 277/480 ÷  
288/500 V, E33 - DIII fuse carrier

Product description	
<b>Product type</b>	Interlocked switched socket-outlet
<b>Series</b>	PK..PB5
<b>N. of poles</b>	3 poles + N +
<b>Clock position</b>	7
<b>Specification</b>	E33 - DIII fuse carrier
Technical data	
<b>Current</b>	32 A
<b>Voltage</b>	277/480 ÷ 288/500 V
<b>IP degree of protection</b>	IP55
Further technical details	
<b>Weight</b>	3.230,00 g
<b>Operating temperature range (min, max)</b>	-25°C ... +40°C
<b>IK rating (impact degree of protection)</b>	IK10



Material properties	
<b>Colour</b>	RAL 7035 grey, RAL 9005 black
<b>RoHs conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>China RoHs - EFUP</b>	50
<b>REACH SVHC substances</b>	Yes Lead
<b>SCIP number</b>	F6799547-ab84-42f2-938f-233ba663766d
Approvals / Standards	
<b>Reference standard</b>	EN 60309-1, -2 e -4
General ordering information	
<b>EAN13 code</b>	8015747081856
Packaging Information	
<b>Packaging length</b>	400,00 mm
<b>Packaging height</b>	165,00 mm
<b>Packaging width</b>	170,00 mm
<b>Packaging weight</b>	3,53 kg
<b>Packaging volume</b>	11,22 dm <sup>3</sup>
<b>Packaging description</b>	Carton box
<b>Packaging quantity</b>	1 Pcs
<b>Packaging EAN code</b>	8015747081863

Part number

# PK 3275 PB5



Catalogue drawings

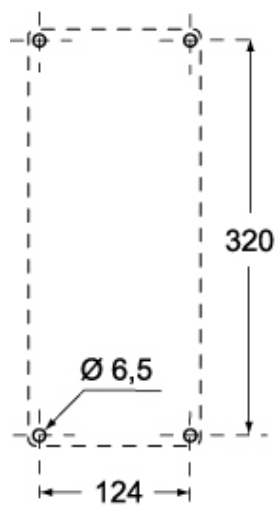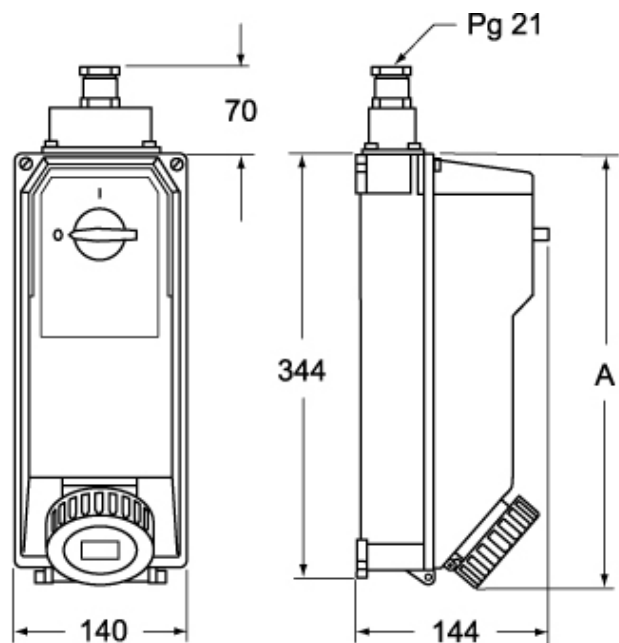

	<b>A</b>
<b>2P+⊕</b>	<b>363</b>
<b>3P+⊕</b>	<b>370</b>
<b>3P+N+⊕</b>	<b>370</b>