


Part number

PN 1664 PV



Mobile socket outlet, PLUSO LS-TYPE series, 3 poles + PE, 6 h (red), 16 A, 380 ÷ 415 V

Product description

Product type	Socket Mobile
Series	PN...PV, PLUSO LS-TYPE
Connection type	Screw terminal connection
N. of poles	3 poles + 
Clock position	6

Technical data

Current	16 A
Voltage	380 ÷ 415 V
IP degree of protection	IP44

Further technical details

Weight	135,00 g
Operating temperature range (min, max)	-25°C ... +40°C

Material properties

Colour	RAL 9005 black
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747198707
-------------------	---------------

Packaging Information

Packaging length	400,00 mm
Packaging height	310,00 mm
Packaging width	670,00 mm
Packaging weight	13,60 kg
Packaging volume	83,08 dm ³
Packaging description	Carton box
Packaging quantity	100 Pcs
Packaging EAN code	8015747198714


Part number

PN 1664 PV



Catalogue drawings

(16A) PN ... PV

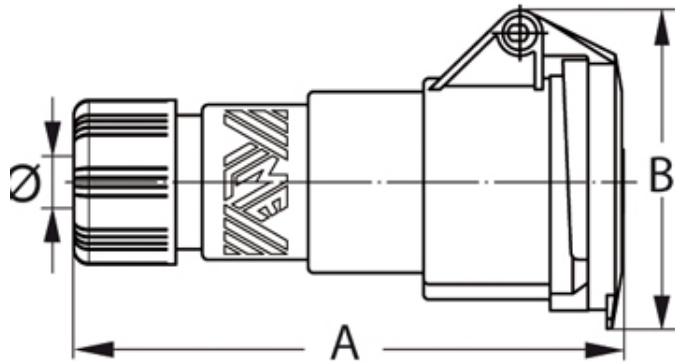

PN...PV	A	B	\varnothing min	\varnothing max
16A 2P+ \oplus	146	74,5	7	16
3P+ \oplus	146	84,5	7	16
3P+N+ \oplus	146	92,5	8	24