

Part number

# SIP 1665 SV



Mobile plug, PLUSO series, 3 poles + N + PE, 6 h (red), 16 A, 200/346 ÷ 240/415 V, with phase inverter

#### Product description

<b>Product type</b>	Plug Mobile
<b>Series</b>	SIP...SV, PLUSO
<b>Connection type</b>	Screw terminal connection
<b>N. of poles</b>	3 poles + N +
<b>Clock position</b>	6
<b>Specification</b>	With phase inverter

#### Technical data

<b>Current</b>	16 A
<b>Voltage</b>	200/346 ÷ 240/415 V
<b>IP degree of protection</b>	IP44

#### Further technical details

<b>Weight</b>	169,00 g
<b>Operating temperature range (min, max)</b>	-25°C ... +40°C

#### Material properties

<b>Colour</b>	RAL 7035 grey, RAL 3000 red
<b>RoHs conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>China RoHs - EFUP</b>	50
<b>REACH SVHC substances</b>	Yes Lead
<b>SCIP number</b>	Ca7de37f-add8-4b77-9861-279c94903ade

#### Approvals / Standards

<b>Reference standard</b>	EN 60309-1 and -2
---------------------------	-------------------

#### General ordering information

<b>EAN13 code</b>	8015747083898
-------------------	---------------

#### Packaging Information

<b>Packaging length</b>	208,00 mm
<b>Packaging height</b>	140,00 mm
<b>Packaging width</b>	290,00 mm
<b>Packaging weight</b>	1,87 kg
<b>Packaging volume</b>	8,44 dm <sup>3</sup>
<b>Packaging description</b>	Carton box
<b>Packaging quantity</b>	10 Pcs
<b>Packaging EAN code</b>	8015747034531


Part number

# SIP 1665 SV



Catalogue drawings

**SIP ... SV**

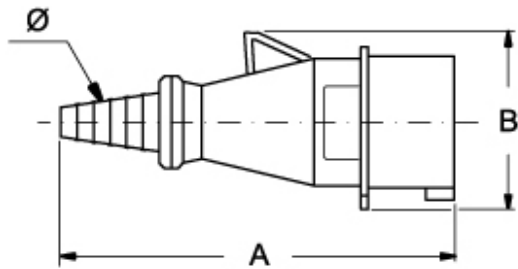


	<b>A</b>	<b>B</b>	<b>Ø min</b>	<b>Ø min</b>
<b>16A</b>	167,5	75	9	22
<b>32A</b>	192,5	87	9	22

Catalogue drawings



**SIPW ... SV**

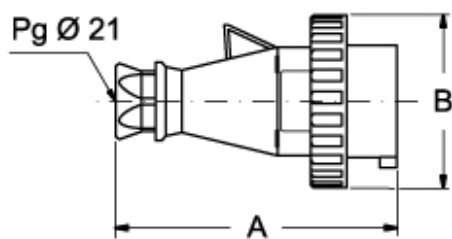

	<b>A</b>	<b>B</b>
<b>16A</b>	150	86
<b>32A</b>	175	99,5

---