


Part number

CIF Q07 2.4

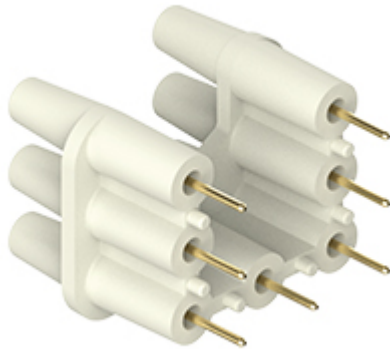

Interface for printed circuit, 7 poles, 7,5 A 250 V 4 kV 3, for up to 2,4 mm thick PCB



| | | | |
|---|---|-------------------------------------|---|
| Product description | | Material properties | |
| Product type | Interface for printed circuit | Main material | Polycarbonate (PC) |
| N. of poles | 7 poles | Other materials | Contacts: copper alloy |
| Specification | For CQ 07 inserts For up to 2,4 mm thick PCB | Colour | RAL 7032 grey |
| Technical data | | RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| Voltage | 250 V | China RoHs - EFUP | 50 |
| Rated impulse withstand voltage | 4 kV | REACH SVHC substances | Yes Lead |
| Pollution degree | 3 | SCIP number | 022a8a72-7a4c-443a-a1ad-2461ccc7884c |
| Contact type | Turned gold plated | Approvals / Standards | |
| Further technical details | | Certifications | DNV |
| Characteristics according to EN 61984 | 7,5 A 250 V 4 kV 3 | UL | ECBT2 |
| Weight | 2,50 g | cUL | ECBT8 |
| Operating temperature range (min, max) | -40°C...+125°C | General ordering information | |
| | | EAN13 code | 8015747270366 |
| | | eCl@ss 8.1 | 27449290 |
| | | ETIM 7.0 | EC002943 |
| | | Packaging Information | |
| | | Packaging length | 112,00 mm |
| | | Packaging height | 95,00 mm |
| | | Packaging width | 117,00 mm |
| | | Packaging weight | 0,33 kg |
| | | Packaging volume | 1,24 dm ³ |
| | | Packaging description | Carton box |
| | | Packaging quantity | 64 Pcs |
| | | Packaging EAN code | 8015747271455 |
| | | Sub-packaging length | 50,00 mm |
| | | Sub-packaging height | 44,00 mm |
| | | Sub-packaging width | 50,00 mm |
| | | Sub-packaging weight | 0,04 kg |
| | | Sub-packaging volume | 0,11 dm ³ |
| | | Sub-packaging description | Carton tray |
| | | Sub-packaging quantity | 8 Pcs |
| | | Sub-packaging EAN barcode | 8015747271462 |

Part number

CIF Q07 2.4



Catalogue drawings

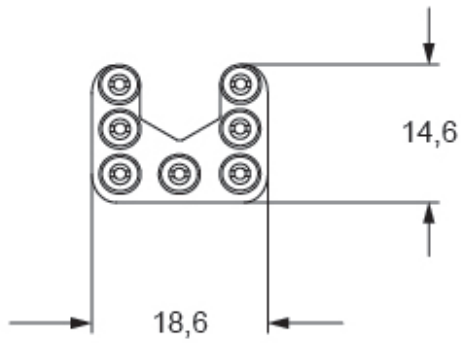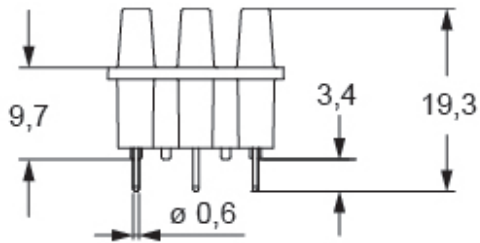

PCB-Layout

