


Part number

# TM 1634 SIT



Interlocked switched socket-outlet, TM series,  
3 poles + PE, 3 h (red), 16 A, 380 ÷ 380 V,  
E16 fuse carrier, without base box

| Product description                     |   |
|---|---|
| Product type                            | Interlocked switched socket-outlet  |
| Series                                  | TM.. SIT  |
| N. of poles                             | 3 poles +  |
| Clock position                          | 3   |
| Specification                           | E16 fuse carrier<br>Without base box  |
| Technical data                          |   |
| Current                                 | 16 A  |
| Voltage                                 | 380V (50Hz.) 440V (60Hz.)   |
| IP degree of protection                 | IP66 / IP67   |
| Further technical details               |   |
| Operating temperature range (min, max)  | -25°C ... +40°C   |
| UL 94 flammability rating               | V-2   |
| IK rating (impact degree of protection) | IK10  |


| Material properties          |                             |
|------------------------------|-----------------------------|
| Colour                       | RAL 7012 grey, RAL 3000 red |
| Approvals / Standards        |                             |
| Reference standard           | EN 60309-1, -2 e -4         |
| General ordering information |                             |
| EAN13 code                   | 8015747161350               |

Part number

# TM 1634 SIT



Catalogue drawings

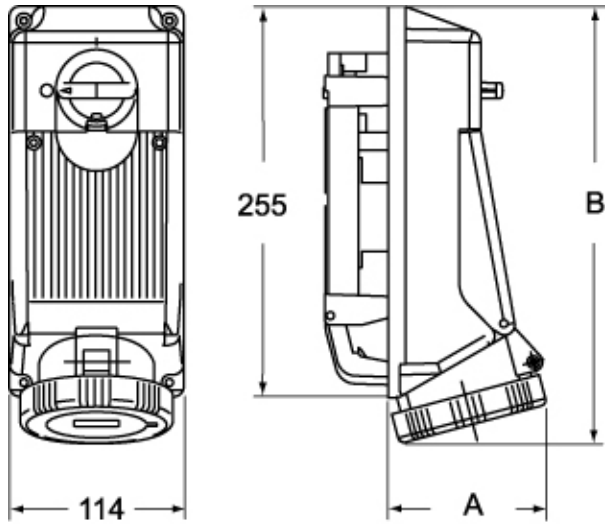

---

|               | <b>A</b> | <b>B</b> |
|---------------|----------|----------|
| <b>2P+⊕</b>   | 83       | 276      |
| <b>3P+⊕</b>   | 85       | 276      |
| <b>3P+N+⊕</b> | 90       | 277      |

---