


Part number

CX 01B 30PEF

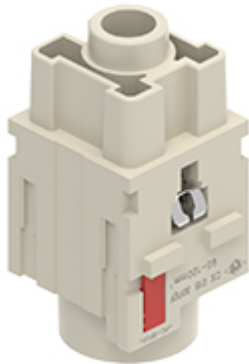

Female modular insert, Mixo series, 300 A, crimp connection, 1 PE pole, 2 modules, PE module for earth termination


Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate
Series	Mixo	Colour	RAL 7032 grey
Connection type	Crimp connection	RoHs conformity	Compliant
Gender	Female	China RoHs - EFUP	E
N. of poles	1 PE pole	REACH SVHC substances	No
Size	2 modules	General ordering information	
Specification	For C30 contacts (95-120 mm ²) PE module for earth termination	EAN13 code	8015747289856
Technical data		eCl@ss 8.1	27440205
Current	300 A	ETIM 7.0	EC000438
Rated voltage according to UL/CSA	600 V	Packaging Information	
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	Packaging weight	0,17 kg
Further technical details		Packaging volume	1,24 dm ³
Mating cycles	≥ 500	Packaging description	Carton box
Insulation resistance	≥ 10 GΩ	Packaging quantity	5 Pcs
Contact resistance	≤ 0,2 mΩ	Packaging EAN code	8015747290029
Weight	23,50 g	Sub-packaging length	112,00 mm
Operating temperature range (min, max)	-40 °C ... +125 °C	Sub-packaging height	95,00 mm
UL 94 flammability rating	V-0	Sub-packaging width	117,00 mm
		Sub-packaging weight	0,03 kg
		Sub-packaging volume	1,24 dm ³
		Sub-packaging description	Plastic bag
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747290036

Part number

CX 01B 30PEF



Catalogue drawings

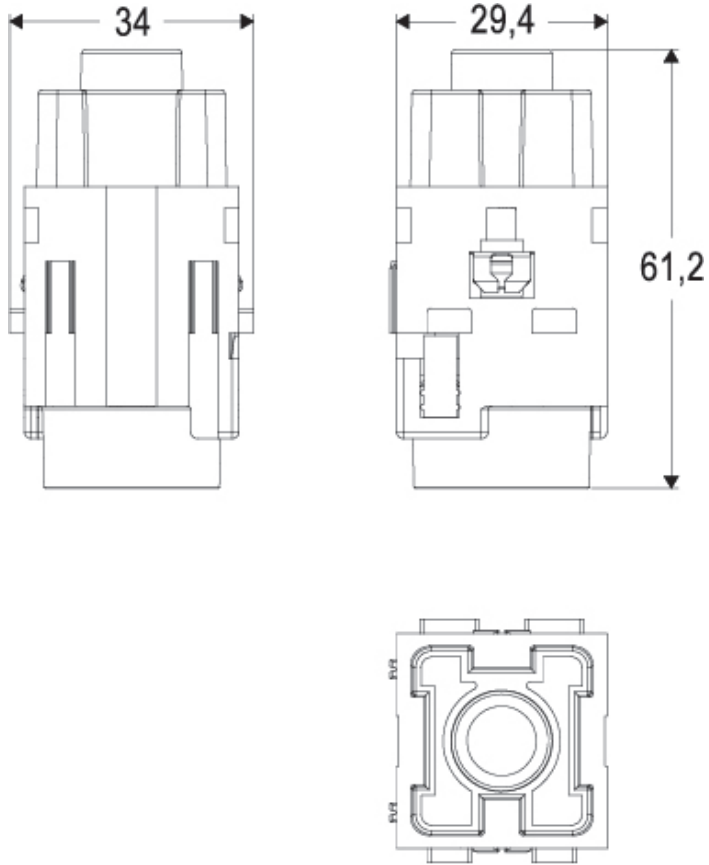

Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.