

Part number

PE 3274 SI



Flush-mounting plug, PLUSO series, 3 poles + PE, 7 h (black), 32 A, 480 ÷ 500 V

Product description		Material properties	
Product type	Plug Flush-mounting	Colour	RAL 7035 grey, RAL 9005 black
Series	PE...SI, PLUSO	Approvals / Standards	
N. of poles	3 poles + 	Reference standard	EN 60309-1 and -2
Clock position	7	General ordering information	
Technical data		EAN13 code	8015747067744
Current	32 A	Packaging Information	
Voltage	480 ÷ 500 V	Packaging weight	2,75 kg
IP degree of protection	IP44	Packaging description	Carton box
Further technical details		Packaging quantity	10 Pcs
Weight	223,00 g	Packaging EAN code	8015747110211
Operating temperature range (min, max)	-25°C ... +40°C		


Part number

PE 3274 SI



Catalogue drawings

(16 / 32A) PE ... SI

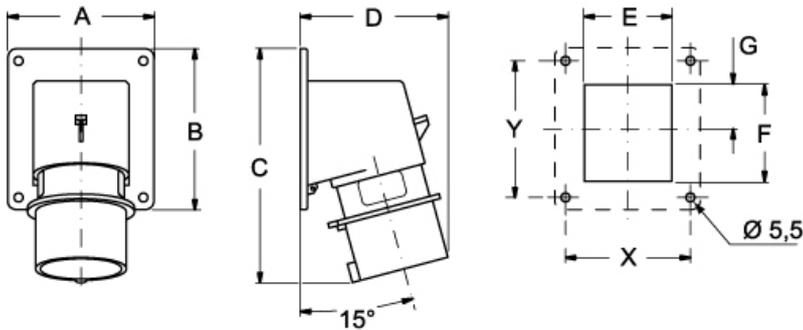

PE ... SI	A	B	C	D	E	F	G	X	Y
16A 2P+⊕	65	82	126	81	41	43	21,5	52	60
	65	82	126	81	47	43	21,5	52	60
	90	100	146	93	54	60	27,5	77	85
32A 2P+⊕	90	100	160	101	55	60	27,5	77	85
	90	100	160	101	55	60	27,5	77	85
	90	100	160	106	62	60	27,5	77	85

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
- Flange with anti-ageing gasket
- PE...SI types (IP44), RAL 7035 grey enclosure, plug mouth colour coded according to the operating voltage
- PEW...SI (IP67) types, RAL 7035 grey enclosure, locking ring with gasket colour coded according to the operating voltage
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- IP44 and IP67 degrees of protection (EN 60529)