


Part number

PEW 12544 PQ



Flush-mounting socket outlet, PLUSO series, 3 poles + PE, 4 h (yellow), 125 A, 100 ÷ 130 V, straight

Product description

Product type	Socket Flush-mounting
Series	PEW...PQ, PLUSO
N. of poles	3 poles + 
Clock position	4
Specification	Straight

Technical data

Current	125 A
Voltage	100 ÷ 130 V
IP degree of protection	IP67

Further technical details

Weight	1.389,00 g
Operating temperature range (min, max)	-25°C ... +40°C

Material properties

Colour	RAL 7035 grey, RAL 1021 yellow
---------------	--------------------------------

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747069960
-------------------	---------------

Packaging Information

Packaging description	Carton box
Packaging quantity	1 Pcs
Packaging EAN code	8015747111270


Part number

PEW 12544 PQ



Catalogue drawings

(63 / 125A) PEW ... PQ

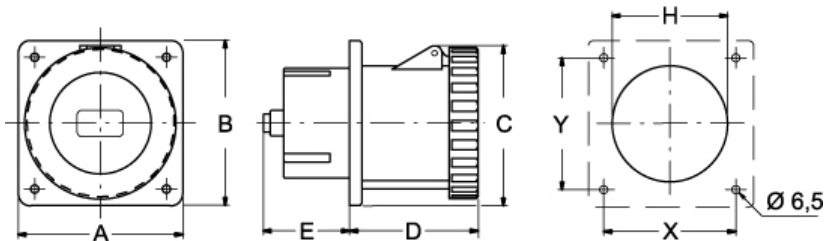

PEW ... PQ	A	B	C	D	E	H	X	Y
63A 2P+⊕	100	107	109	92	30	73	77	85
	100	107	109	92	30	73	77	85
	100	107	109	92	30	73	77	85
125A 2P+⊕	130	130	130	101	68	91	104	104
	130	130	130	101	68	91	104	104
	130	130	130	101	68	91	104	104

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- Flange with anti-ageing gasket
- PE...PQ types (IP44), spring lid
- PEW...PQ types (IP67), spring lid with locking ring and gasket
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- IP44 and IP67 degrees of protection (EN 60529)