


Part number

# PEW 3263 PV



Mobile socket outlet, PLUSO series, 2 poles + PE, 6 h (blue), 32 A, 200 ÷ 250 V

Product description		Material properties	
<b>Product type</b>	Socket Mobile	<b>Colour</b>	RAL 7035 grey, RAL 5015 blue
<b>Series</b>	PEW...PV, PLUSO	<b>RoHs conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>N. of poles</b>	2 poles + 	<b>China RoHs - EFUP</b>	50
<b>Clock position</b>	6	<b>REACH SVHC substances</b>	Yes Lead
Technical data		<b>SCIP number</b>	Ca7de37f-add8-4b77-9861-279c94903ade
<b>Current</b>	32 A	Approvals / Standards	
<b>Voltage</b>	200 ÷ 250 V	<b>Reference standard</b>	EN 60309-1 and -2
<b>IP degree of protection</b>	IP67	General ordering information	
Further technical details		<b>EAN13 code</b>	8015747075282
<b>Weight</b>	270,00 g	Packaging Information	
<b>Operating temperature range (min, max)</b>	-25°C ... +40°C	<b>Packaging length</b>	330,00 mm
		<b>Packaging height</b>	175,00 mm
		<b>Packaging width</b>	295,00 mm
		<b>Packaging weight</b>	3,16 kg
		<b>Packaging volume</b>	17,04 dm <sup>3</sup>
		<b>Packaging description</b>	Carton box
		<b>Packaging quantity</b>	10 Pcs
		<b>Packaging EAN code</b>	8015747075299


Part number

# PEW 3263 PV



Catalogue drawings

(16 / 32A) PEW ... PV

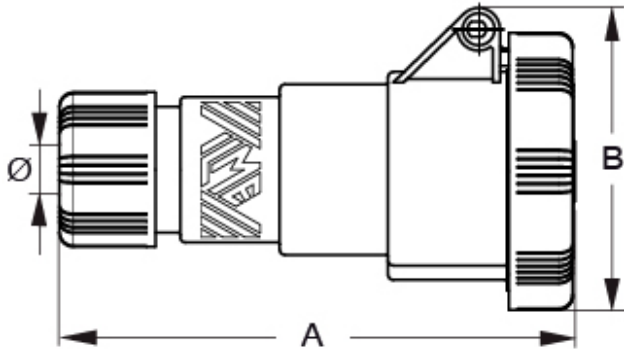

PEW...PV	A	B	ø min	ø max
<b>16A</b> 2P+⊕	145	77	7	16
3P+⊕	145	85	7	16
3P+N+⊕	145	93	8	24
<b>32A</b> 2P+⊕	162	97	8	24
3P+⊕	162	97	8	24
3P+N+⊕	162	105	8	24

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

32A only version PHW...PV)

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- PE...PV types 16A and 32A (IP44), RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage, entry with cable gland
- PEW...PV types 16A, 32A, 63A and 125A (IP66/IP67), RAL 7035 grey enclosure, spring lid with locking ring and gasket
- PEW...PV types 63A and 125A (IP67), cable anchoring collar incorporated in the insert
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts standard on 63A and 125A (on 16A and