


Part number

TM 1665 SIR



Interlocked switched socket-outlet, TM series, 3 poles + N + PE, 6 h (red), 16 A, 200/346 ÷ 240/415 V, with compartment for modular units, 4,5 DIN-rail modules EN 60715, without base box

Product description	
Product type	Interlocked switched socket-outlet
Series	TM..SIR/KSIR
N. of poles	3 poles + N + 
Clock position	6
Size	114 x 255 mm fixing distance, for assembly in single or multiple boxes
Specification	With compartment for modular units, 4,5 DIN-rail modules EN 60715 Without base box
Technical data	
Current	16 A
Voltage	200/346 ÷ 240/415 V
IP degree of protection	IP66 / IP67
Further technical details	
Weight	1.070,00 g
Operating temperature range (min, max)	-25°C ... +40°C
UL 94 flammability rating	V-2
IK rating (impact degree of protection)	IK10


Material properties	
Colour	RAL 7012 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Approvals / Standards	
Reference standard	EN 60309-1, -2 e -4
General ordering information	
EAN13 code	8015747090209
Packaging Information	
Packaging weight	9,63 kg
Packaging volume	55,44 dm ³
Packaging description	Carton box
Packaging quantity	9 Pcs
Packaging EAN code	8015747090216
Sub-packaging length	95,00 mm
Sub-packaging height	40,00 mm
Sub-packaging width	253,00 mm
Sub-packaging weight	1,07 kg
Sub-packaging volume	0,96 dm ³
Sub-packaging description	Plastic packaging
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747090223

Part number

TM 1665 SIR



Catalogue drawings

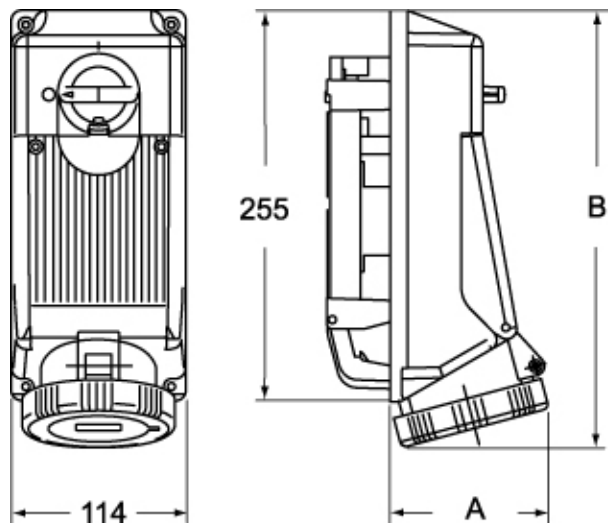

	A	B
2P+⊕	83	276
3P+⊕	85	276
3P+N+⊕	90	277

Notes

Dimensions shown in mm are not binding and may be changed without notice.
