



Part number

# PEW 12575 SV

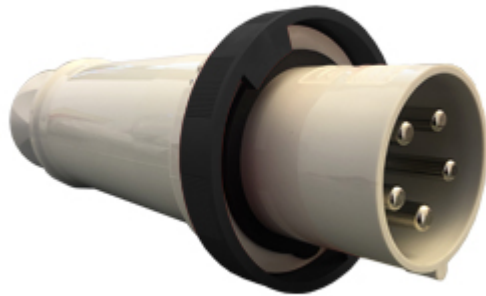

Mobile plug, PLUSO series, 3 poles + N + PE, 7 h (black), 125 A, 277/480 ÷ 288/500 V, straight

Product description		Material properties	
<b>Product type</b>	Plug Mobile	<b>Colour</b>	RAL 7035 grey, RAL 9005 black
<b>Series</b>	PEW...SV, PLUSO	<b>RoHs conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>N. of poles</b>	3 poles + N + 	<b>China RoHs - EFUP</b>	50
<b>Clock position</b>	7	<b>REACH SVHC substances</b>	Yes Lead
<b>Specification</b>	Straight	<b>SCIP number</b>	Ca7de37f-add8-4b77-9861-279c94903ade
Technical data		Approvals / Standards	
<b>Current</b>	125 A	<b>Reference standard</b>	EN 60309-1 and -2
<b>Voltage</b>	277/480 ÷ 288/500 V	General ordering information	
<b>IP degree of protection</b>	IP67	<b>EAN13 code</b>	8015747070959
Further technical details		Packaging Information	
<b>Weight</b>	1.815,00 g	<b>Sub-packaging length</b>	325,00 mm
<b>Operating temperature range (min, max)</b>	-25°C ... +40°C	<b>Sub-packaging height</b>	125,00 mm
		<b>Sub-packaging width</b>	125,00 mm
		<b>Sub-packaging weight</b>	1,82 kg
		<b>Sub-packaging volume</b>	5,08 dm <sup>3</sup>
		<b>Sub-packaging description</b>	Carton box
		<b>Sub-packaging quantity</b>	1 Pcs
		<b>Sub-packaging EAN barcode</b>	8015747070966

Part number

# PEW 12575 SV



Catalogue drawings

(63 / 125A) PEW ... SV



PEW ... SV	A	B	Pg Ø
<b>63A</b> 2P+⊕	264,5	112	36
3P+⊕	264,5	112	36
3P+N+⊕	264,5	112	36
<b>125A</b> 2P+⊕	310	130	2" gas
3P+⊕	310	130	2" gas
3P+N+⊕	310	130	2" gas

Notes