

Part number

C30MA 50 P



Male crimp contact, C30 series, 300 A, turned silver plated, wire cross section 50 mm², AWG 1, finger-proof version

Product description

Product type	Crimp contact
Series	C30
Gender	Male
Specification	Finger-proof version

Technical data

Current	300 A
Wire cross-section	50,00 mm ²
AWG size	1
Contact type	Turned silver plated

Further technical details

Contact resistance	≤ 0,2 mΩ
Weight	37,10 g
Conductors stripping length	22,5 mm

Material properties

Main material	Copper alloy
Other materials	Cap: polycarbonate (PC)
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead

General ordering information

EAN13 code	8015747290807
-------------------	---------------

Packaging Information


Packaging length	112,00 mm
Packaging height	95,00 mm
Packaging width	117,00 mm
Packaging volume	1,24 dm ³
Packaging description	Carton box
Packaging quantity	40 Pcs
Packaging EAN code	8015747290821
Sub-packaging description	Plastic box
Sub-packaging quantity	5 Pcs
Sub-packaging EAN barcode	8015747290814

Part number

C30MA 50 P



Catalogue drawings

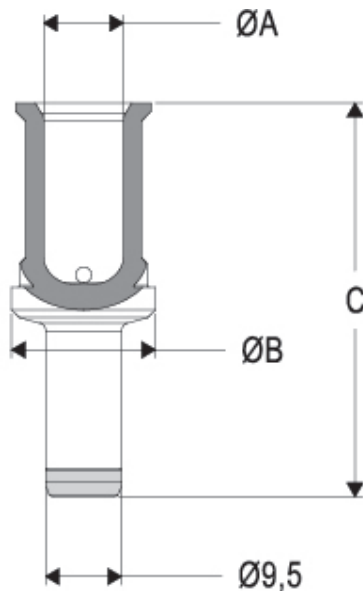

C30MA..P contacts

conductor section (mm ²)	conductor slot $\varnothing A$ (mm)	$\varnothing B$ (mm)	C (mm)	conductor stripping length (mm)
16	5,5	18	42,7	19
25	7	18	42,7	19
35	8,2	18	43,7	20
50	10	18	49,2	22,5
70	11,5	18	49,2	22,5
95	13,5	21	49,2	22,5
120	15,5	21	49,2	22,5

Notes

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.