

Part number

# CSHF 10



Female insert, CSH series, SQUICH® spring terminal connection without tools, 10 poles + PE, 16 A 500 V 6 kV 3, size "57.27"

| Product description                           |  | Material properties              |  |
|---|--|----------------------------------|--|
| <b>Product type</b>                           | Insert   | <b>Main material</b>             | Polycarbonate (PC)   |
| <b>Series</b>                                 | CSH  | <b>Other materials</b>           | Contacts: copper alloy   |
| <b>Connection type</b>                        | SQUICH® spring terminal connection without tools           | <b>Colour</b>                    | RAL 7032 grey  |
| <b>Gender</b>                                 | Female   | <b>RoHs conformity</b>           | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| <b>N. of poles</b>                            | 10 poles +   | <b>China RoHs - EFUP</b>         | 50   |
| <b>Size</b>                                   | Size 57.27   | <b>REACH SVHC substances</b>     | Yes<br>Lead  |
| Technical data                                |  | <b>SCIP number</b>               | 1a9c93ff-0445-4a16-81e3-1609ac5274d6   |
| <b>Current</b>                                | 16 A   | Approvals / Standards            |  |
| <b>Voltage</b>                                | 500 V  | <b>Reference standard</b>        | EN 61984:2009-06   |
| <b>Rated impulse withstand voltage</b>        | 6 kV   | <b>Certifications</b>            | CSA, CQC, DNV, BV, EAC   |
| <b>Pollution degree</b>                       | 3  | <b>UL</b>                        | ECBT2, PVVA2   |
| <b>Rated voltage according to UL/CSA</b>      | 600 V  | <b>cUL</b>                       | ECBT8, PVVA8   |
| <b>Wire cross-section</b>                     | 0,14 mm <sup>2</sup> - 2,50 mm <sup>2</sup>                | General ordering information     |  |
| <b>AWG size</b>                               | 26 - 14  | <b>EAN13 code</b>                | 8015747019194  |
| <b>Contact type</b>                           | Turned silver plated                                       | <b>eCl@ss 8.1</b>                | 27440205   |
| <b>IP degree of protection</b>                | IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure | <b>ETIM 7.0</b>                  | EC000438   |
| Further technical details                     |  | Packaging Information            |  |
| <b>Characteristics according to EN 61984</b>  | 16A 500V 6kV 3; 16A 400/690V 6kV 2                         | <b>Packaging length</b>          | 245,00 mm  |
| <b>Mating cycles</b>                          | ≥ 500  | <b>Packaging height</b>          | 165,00 mm  |
| <b>Insulation resistance</b>                  | ≥ 10 GΩ  | <b>Packaging width</b>           | 215,00 mm  |
| <b>Contact resistance</b>                     | ≤ 3 mΩ   | <b>Packaging weight</b>          | 2,50 kg  |
| <b>Weight</b>                                 | 66,50 g  | <b>Packaging volume</b>          | 8,69 dm <sup>3</sup>   |
| <b>Operating temperature range (min, max)</b> | -40 °C ... +125 °C   | <b>Packaging description</b>     | Carton box   |
| <b>Conductors stripping length</b>            | 9...11 mm  | <b>Packaging quantity</b>        | 30 Pcs   |
| <b>UL 94 flammability rating</b>              | V-0  | <b>Packaging EAN code</b>        | 8015747170666  |
|   |  | <b>Sub-packaging length</b>      | 197,00 mm  |
|   |  | <b>Sub-packaging height</b>      | 44,00 mm   |
|   |  | <b>Sub-packaging width</b>       | 113,00 mm  |
|   |  | <b>Sub-packaging weight</b>      | 0,42 kg  |
|   |  | <b>Sub-packaging volume</b>      | 0,98 dm <sup>3</sup>   |
|   |  | <b>Sub-packaging description</b> | Carton tray  |
|   |  | <b>Sub-packaging quantity</b>    | 5 Pcs  |
|   |  | <b>Sub-packaging EAN barcode</b> | 8015747170673  |


Part number  
**CSHF 10**



Catalogue drawings

Catalogue drawings

dimensions in mm

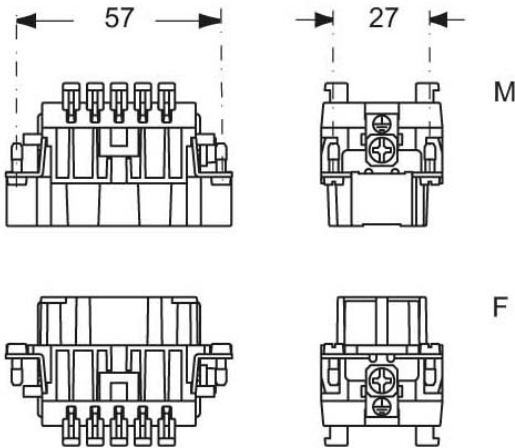

contacts side (front view)





diagram CSH 10 poles



Notes

California Proposition 65 Information

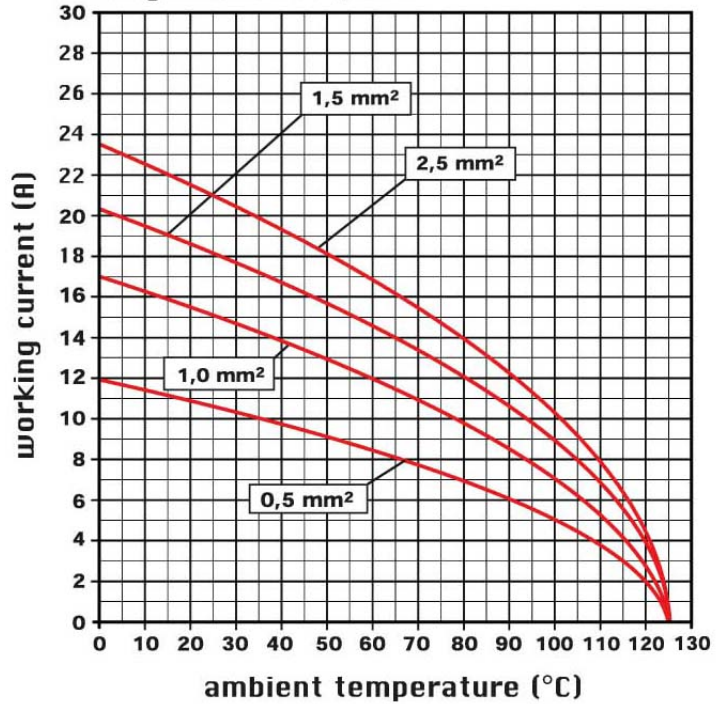

**WARNING**

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## California Proposition 65 Information



### WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

